


How to order ?


Hw	絃緯科技股份有限公司				文件編號	WI0403																			
	作業指導書				版次	0																			
	成品料號編碼				頁次	1																			
審核		批准			生效日期	98/7/27																			
T24	A	105	A	B	F	2	15																		
機種	開關狀態	溫度	誤差	上蓋(支架)固定方式		端子型式	端子規格	(手動)復歸區間值																	
T23	A-NC	070	A±3°C	固定式	款式	材質	F-平腳:0度	1-187端子,0.8t,銅鍍錫	10 (10°C)																
T24	B-NO	091	B±5°C		B-埋入式上蓋	鋁質	L-單邊:90度	2-250端子,0.8t,銅鍍錫	15 (15°C)																
	M-手動	110	C±8°C		C-C蓋	鋁質	R-90度腳	3-Solder,0.5t,銅鍍錫	N (One-shot)																
		.	D±10°C		E-支架	鐵鍍鋅	T-45度腳	4-DIP,0.5t,銅鍍錫	T23:M1按鈕尺寸-4.7(dia.) * 5.3(h) mm																
		.			X-支架	白鐵	BT	6-Weld,0.5t,鐵鍍錫	T23:M7按鈕尺寸-6.0(dia.) * 7.9(h) mm																
		.			P(T23-四柱)		客戶要求角度,可配合斜:10度,20度,65度	7-187端子,0.5t,銅鍍錫	T24:M7按鈕尺寸-4.7(dia.) * 5.3(h) mm																
		.			H-六角銅頭	黃銅		8-250端子,0.8t,蝴蝶型,鐵鍍鋅	T24:M5按鈕尺寸-6.0(dia.) * 7.9(h) mm																
		.			R-圓銅頭	黃銅		9-187端子,0.8t,蝴蝶型,鐵鍍鋅																	
		.			D-白鐵上蓋	白鐵																			
		.			L-夾管	白鐵																			
		.			V-開孔上蓋	白鐵																			
		.			T-埋入式上蓋	白鐵																			
T26 - 110 - A - U ↓ ↓ ↓ ↓ <table border="1"> <tr> <th>機種</th> <th>溫度</th> <th>誤差</th> <th>識別碼</th> </tr> <tr> <td>T26</td> <td>100</td> <td>A±5°C</td> <td>U-UL</td> </tr> <tr> <td></td> <td>110</td> <td>B±7.5°C</td> <td>V-VDE</td> </tr> <tr> <td></td> <td>120</td> <td>C±10°C</td> <td></td> </tr> </table>				機種	溫度	誤差	識別碼	T26	100	A±5°C	U-UL		110	B±7.5°C	V-VDE		120	C±10°C		活動式	O-O支架	鐵鍍鋅			
機種	溫度	誤差	識別碼																						
T26	100	A±5°C	U-UL																						
	110	B±7.5°C	V-VDE																						
	120	C±10°C																							
					M-M支架	鐵鍍鋅																			
					S-S支架	鐵鍍鋅																			
					G-G支架	鐵鍍鋅																			
					U-U支架	白鐵																			

黃銅:Brass (上蓋)
紅銅:Copper(鉚釘)

BT Terminal :

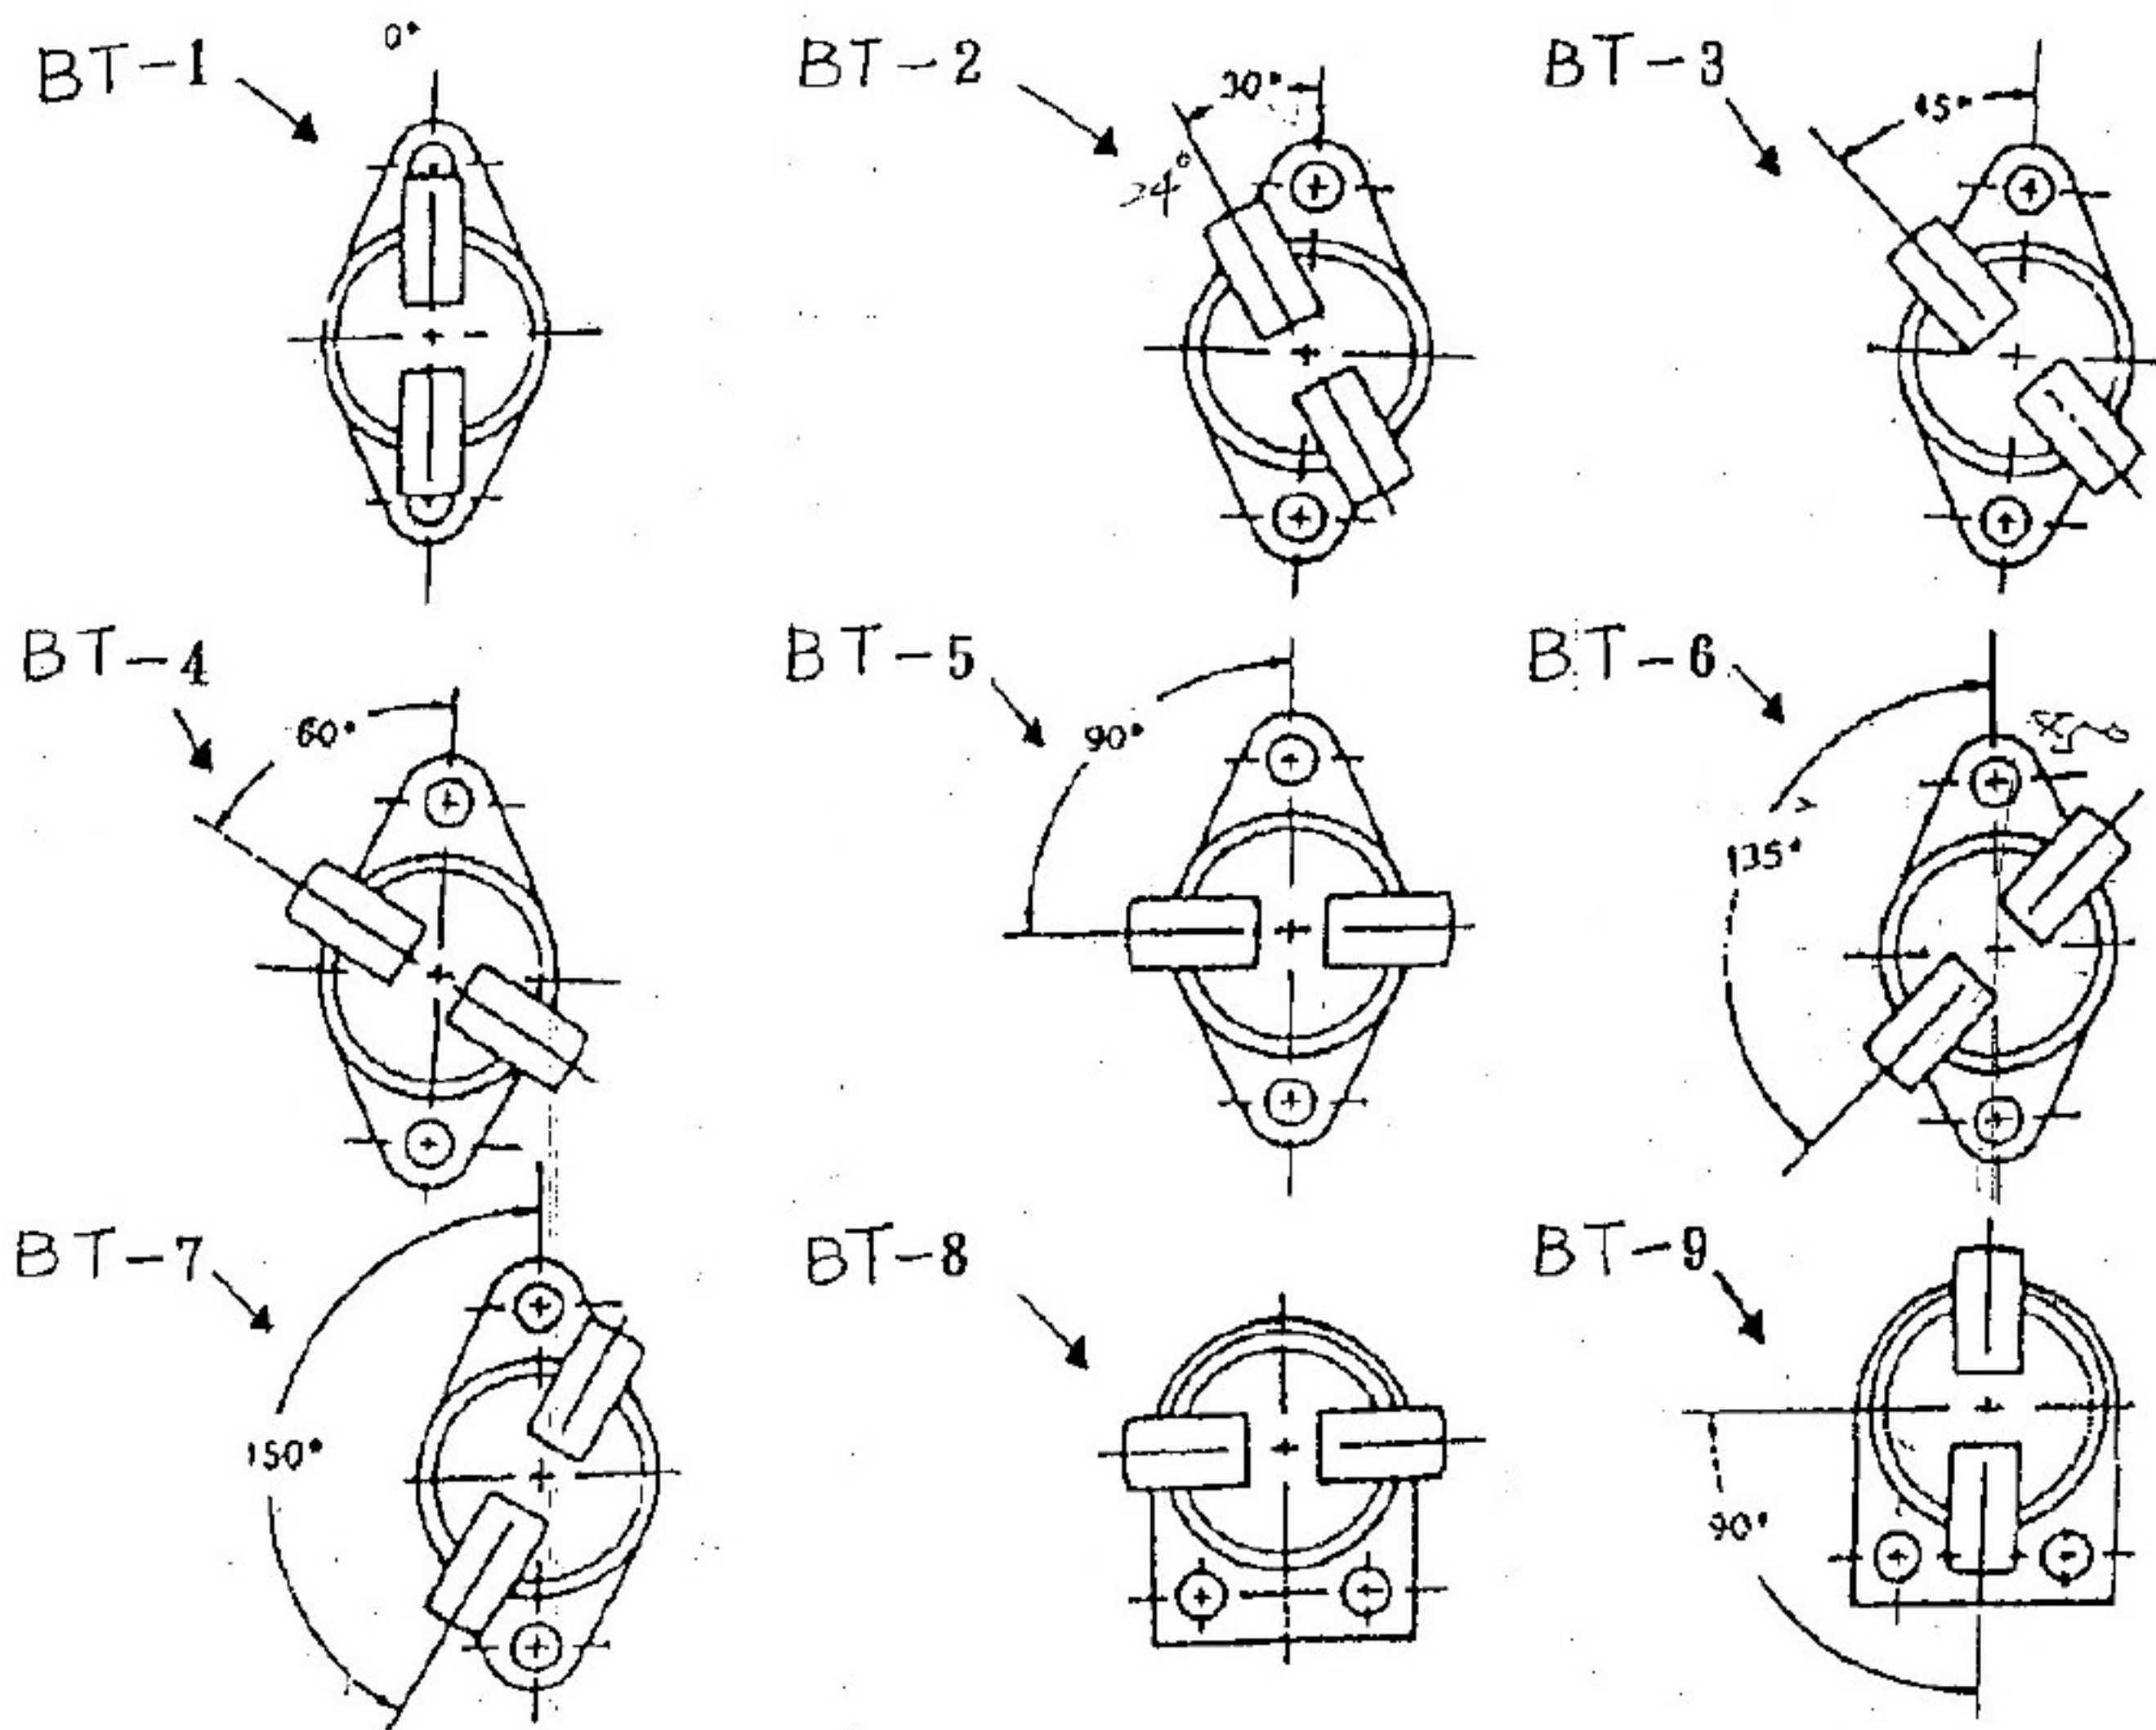

T24 A110BBF2-15

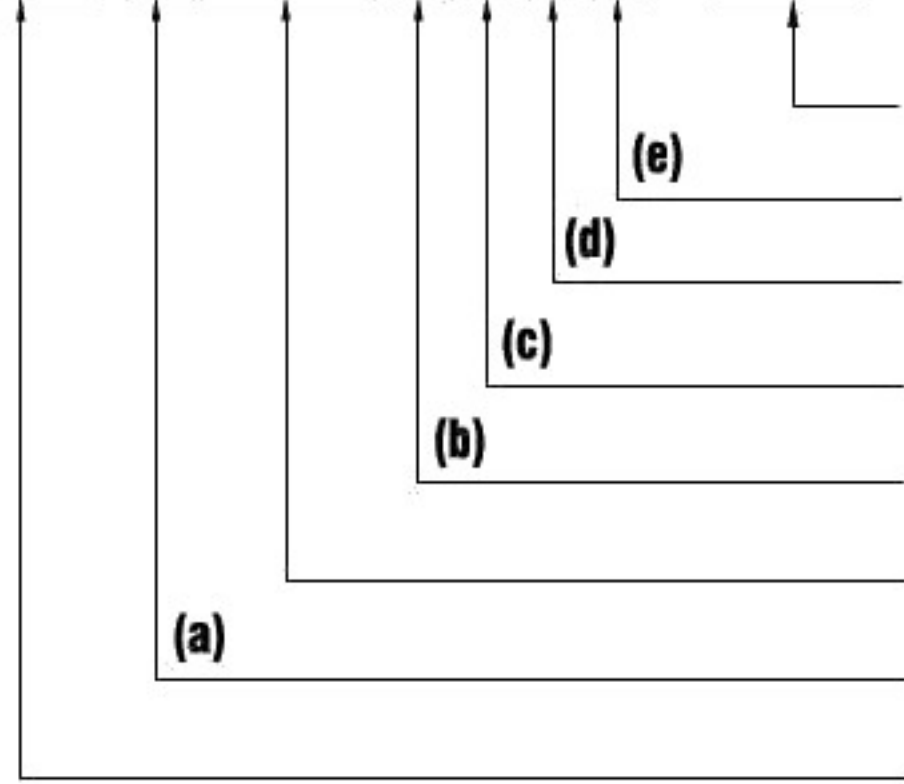

復位區間
 端子規格
 端子角度
 支架型式
 溫度公差
 動作溫度
 觸點型式
 機 種

