


TILT SWITCH 1016 SERIES

SPECIFICATION

- Electrical Rating : 1~200mA /1~24VDC
- Electrical Life: >1x10⁶ Cycles
- Contact Resistance: 10Ω (measured at 90° tilt)
- Switching Angle : 45°±10°
- Solder Temperature: 260°C 5 Seconds (Solder bath)
350°C 3 Seconds (Solder iron)
- Ambient Temperature: -25°C~85°C
- RoHs Compliance

APPLICATION

- Game machines and toys, Security systems, Electrical and electronic products, Personal security alarms, Vibration sensors, Car alarms.

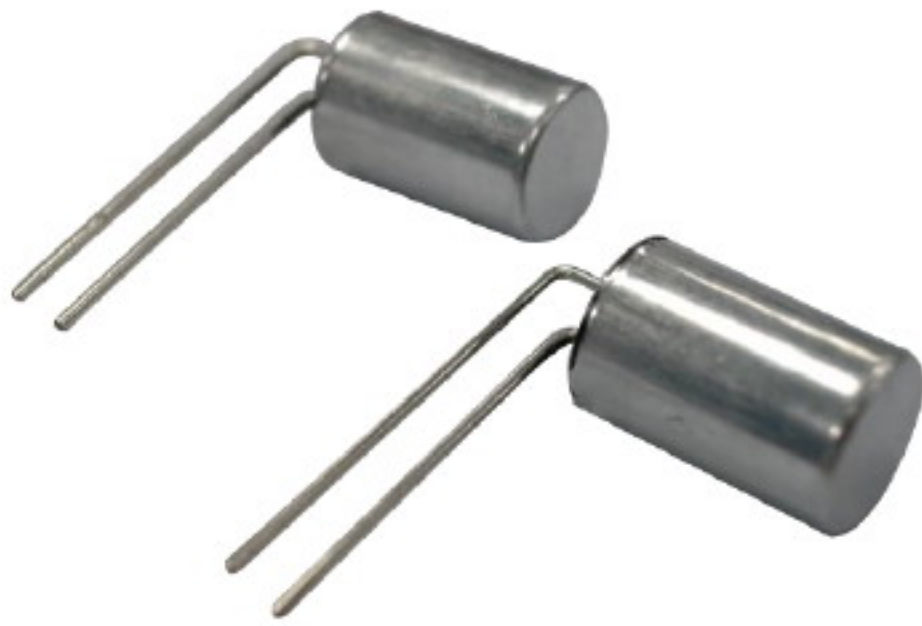

1016

