


2M-CF2

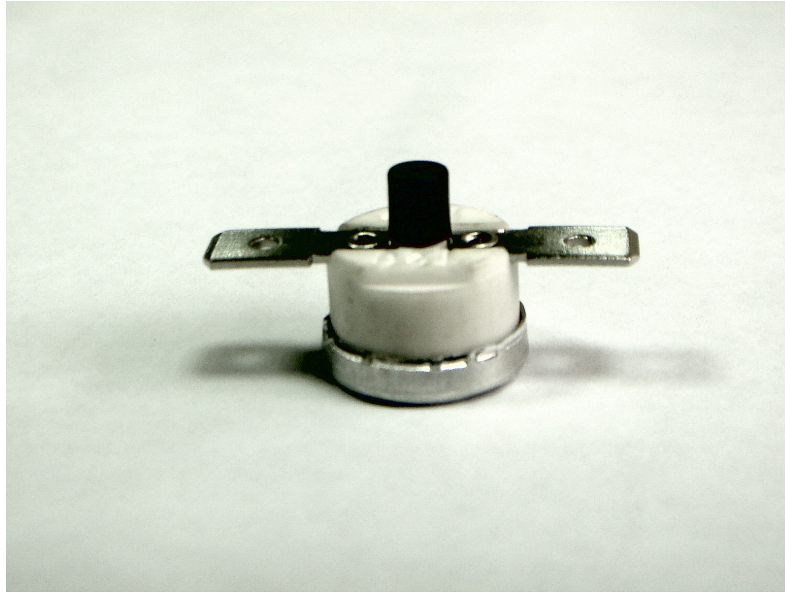

- *Electrical Rating: 15A/125V AC 10A/250V AC
- *Operation Temp: 40°C ~230°C
- *Differential: 10K~80K(Standard 15K)
- *Calibration Method: 1°C/min. Air circulation furnace
- *Temp. Tolerance: ±3K / ±5K / ±8K
- *Heat Durability: 220°C MAX.
- *Circuit Resistance: 50 mΩ MAX.
- *Insulation Resistance: 100MΩ min. at DC 500V
- *Dielectric Strength: AC1000V for One Minute or AC 1800V for One Second(Leak current: 0.5mA)
- *Operation life: 6,000 Cycles(15A 125V AC / 10A 250V AC)