


## 3A-HF1

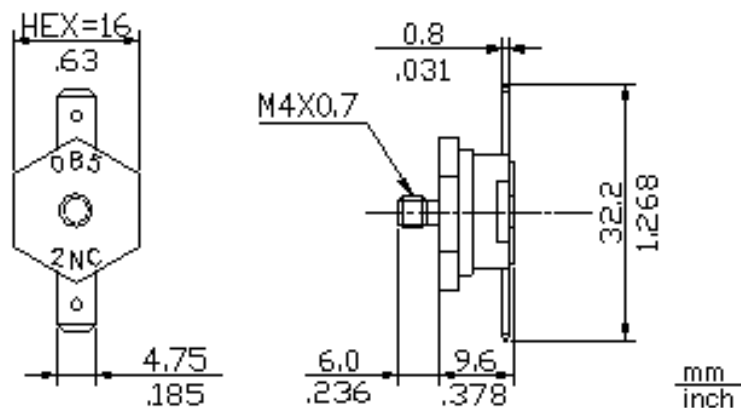

\*Electrical Rating: 16A/250V AC 15A/125V AC 10A/250V AC

\*Operation Temp: 0°C~180(VDE)

50°C~205°C (UL/CUL)

\*Differential:10K~30K

\*Calibration Method:1°C/min. Air circulation furnace

\*Temp. Tolerance: ±3K / ±5K

\*Heat Durability: 180°C \*2Hr MAX.

\*Circuit Resistance:50 mΩ MAX.

\*Insulation Resistance: 100MΩ min. at DC 500V

\*Dielectric Strength:AC1000V for One Minute or AC 1800V for One Second(Leak current:0.5mA)

\*Operation life:100,000 Cycles(15A 125V AC / 10A 250V AC)

10,000 Cycles(16A 250V AC)

**Copyright © 2006 HONEST-WELL CO., LTD. ALL RIGHTS RESERVED.  
3F, NO.450, SEC. 2, CHUNG-SAN RD., CHUNG-HO CITY, TAIPEI, TAIWAN.**

**TEL:886-2-2222-2398 FAX:886-2-2222-2508**

**E-Mail : [service@honest-well.com.tw](mailto:service@honest-well.com.tw)**