
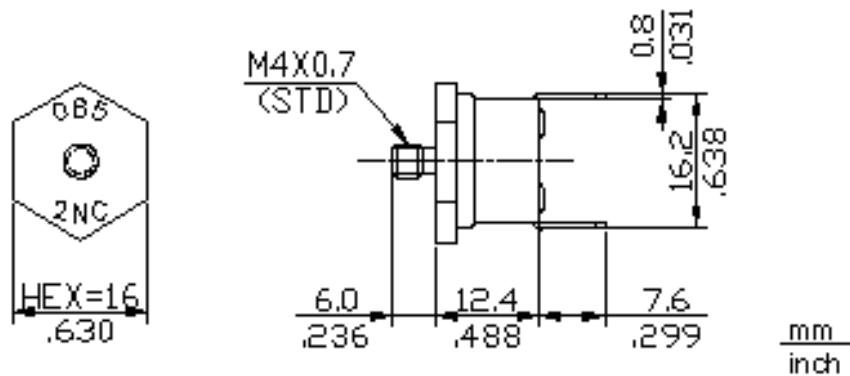


4B-HR1

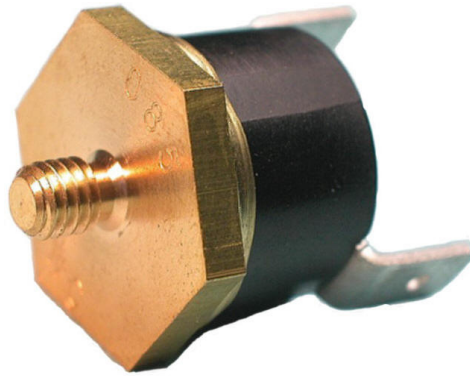

- *Electrical Rating: 16A/250V AC 15A/125V AC 10A/250V AC
- *Operation Temp: 40°C ~200(ENEC)
40°C ~205°C (UL/CUL)
- *Differential: 10K~65K
- *Calibration Method: 1°C/min. Air circulation furnace
- *Temp. Tolerance: ±3K / ±5K
- *Heat Durability: 180°C *2Hr MAX.
- *Circuit Resistance: 50 mΩ MAX.
- *Insulation Resistance: 100MΩ min. at DC 500V
- *Dielectric Strength: AC1000V for One Minute or AC 1800V for One Second (Leak current: 0.5mA)
- *Operation life: 100,000 Cycles (15A 125V AC / 10A 250V AC)
10,000 Cycles (16A 250V AC)