
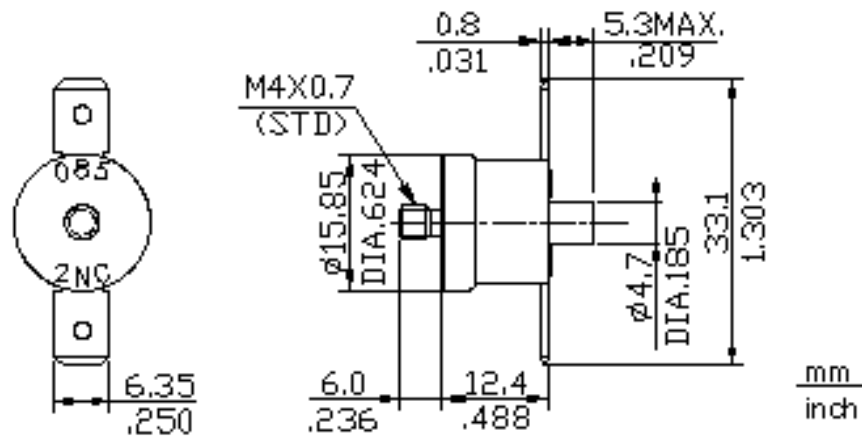


4M-RF2

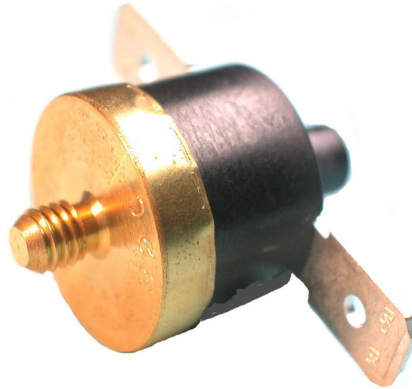

- *Electrical Rating: 15A/125V AC
- *Operation Temp: 40°C ~205°C (UL/CUL)
- *Differential: 10K~65K
- *Calibration Method: 1°C/min. Air circulation furnace
- *Temp. Tolerance: $\pm 3K / \pm 5K$
- *Heat Durability: 180°C *2Hr MAX.
- *Circuit Resistance: 50 m Ω MAX.
- *Insulation Resistance: 100M Ω min. at DC 500V
- *Dielectric Strength: AC1000V for One Minute or AC 1800V for One Second (Leak current: 0.5mA)
- *Operation life: 6,000 次