






# Air-Conditioner

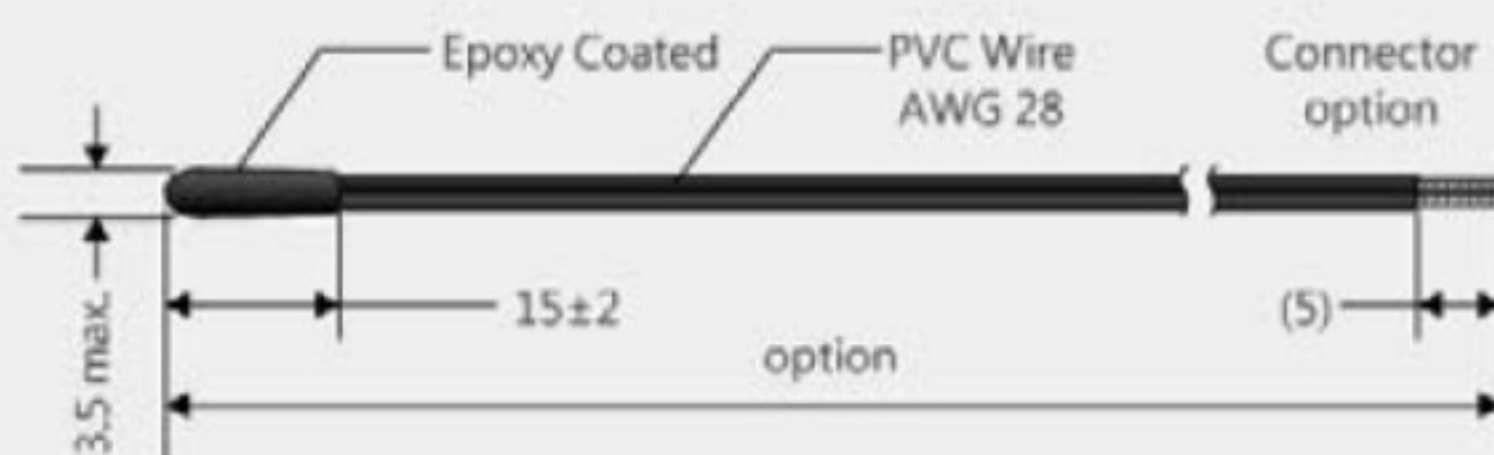


Application :  
 Air conditioner  
 Operating temp. range :  
 -30~ +100°C  
 Dissipation constant :  
 Approx. 2.3mW/°C  
 Thermal time constant :  
 Approx. 5.5 sec  
 Withstand voltage :  
 1000V AC for 1 min

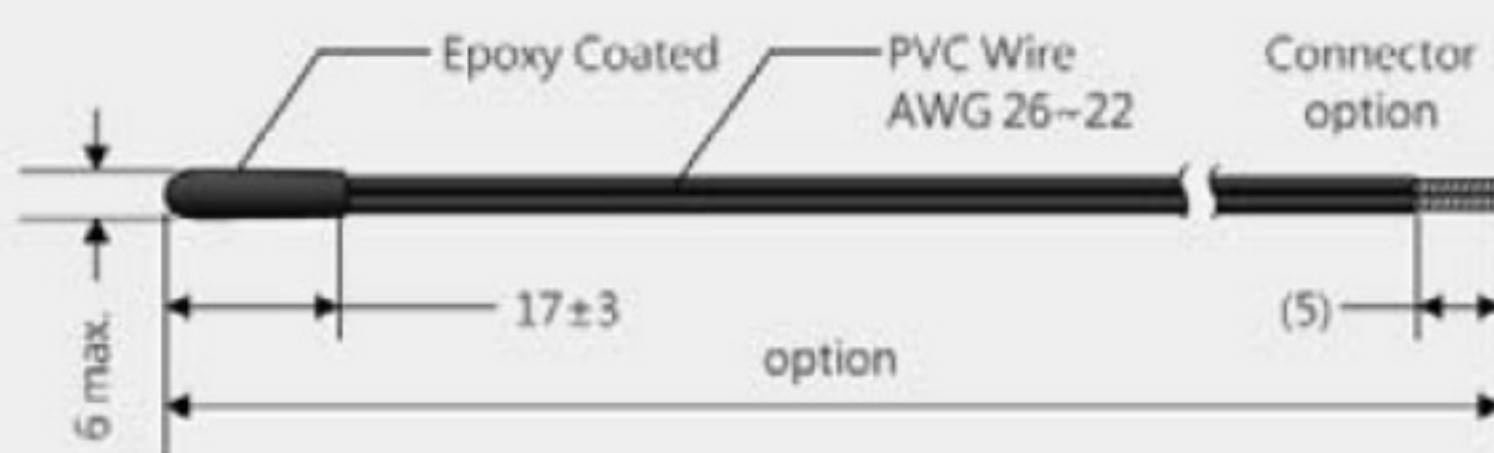


Application :  
 Air conditioner  
 Operating temp. range :  
 -30~ +100°C  
 Dissipation constant :  
 Approx. 2.5mW/°C  
 Thermal time constant :  
 Approx. 8 sec  
 Withstand voltage :  
 1500V AC for 1 min

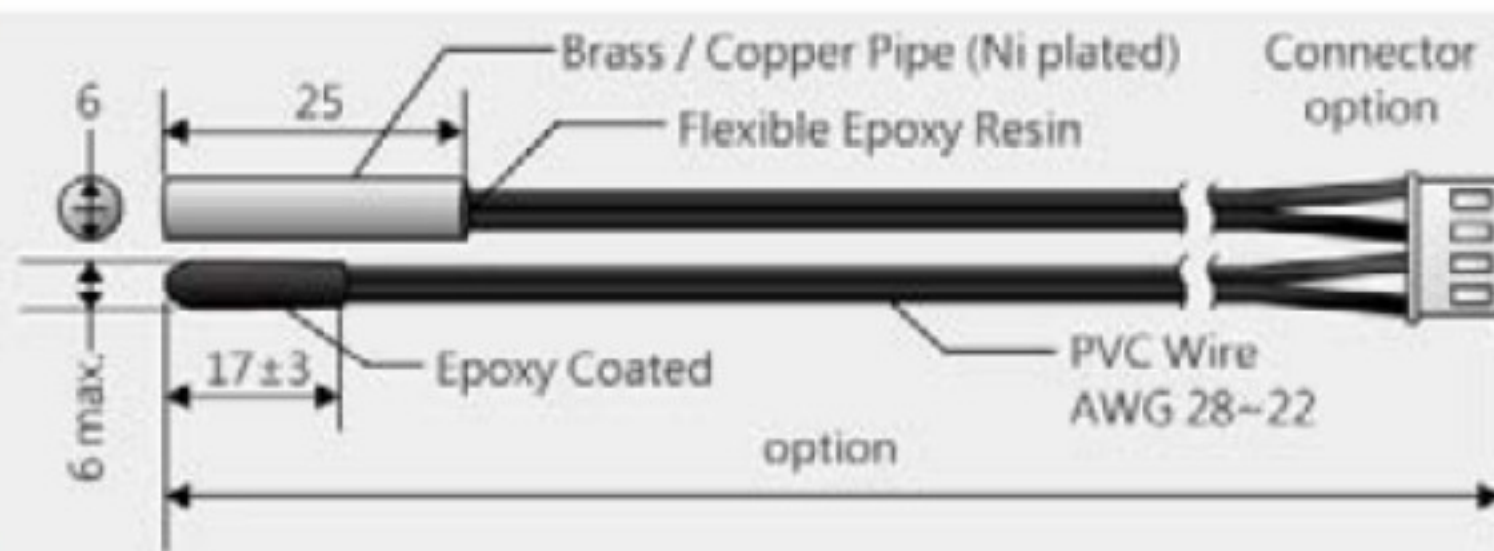

Application :  
 Air conditioner  
 Operating temp. range :  
 -30~ +100°C  
 Dissipation constant :  
 Approx. 2.5mW/°C  
 Thermal time constant :  
 Approx. 8 sec  
 Withstand voltage :  
 1500V AC for 1 min

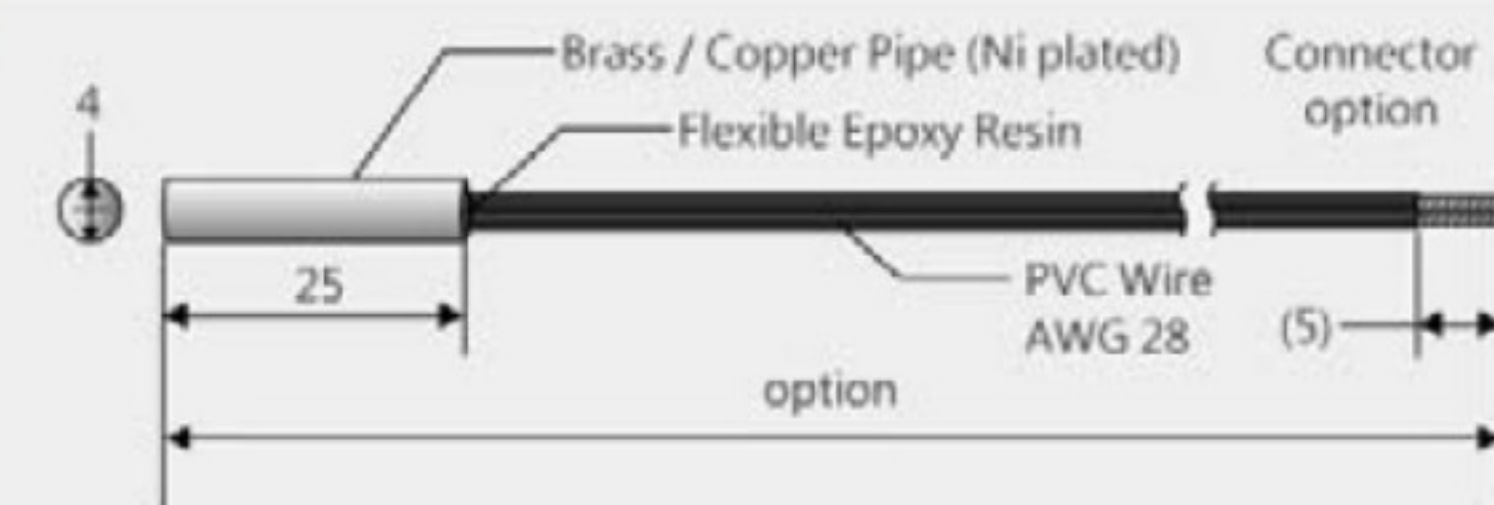


Application :  
 Air conditioner, Heat Exchanger  
 Operating temp. range :  
 -30~ +100°C  
 Dissipation constant :  
 Approx. 2.5mW/°C  
 Thermal time constant :  
 Approx. 6 sec  
 Withstand voltage :  
 1500V AC for 1 min

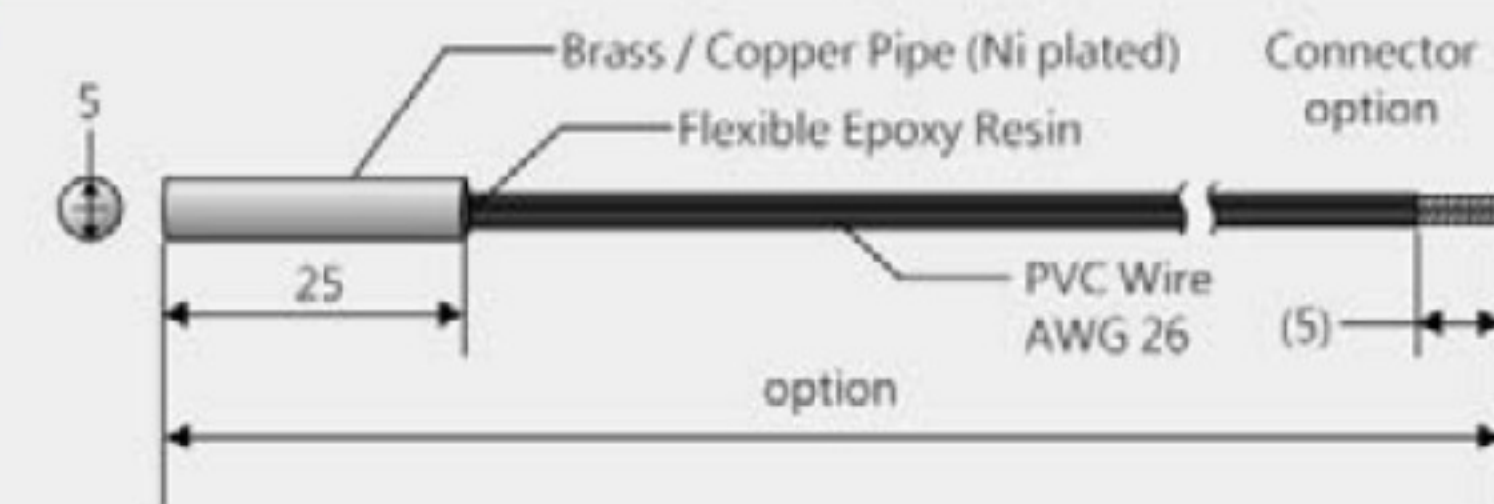


Application :  
 Air conditioner, Heat Exchanger  
 Operating temp. range :  
 -30~ +100°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 15 sec  
 Withstand voltage :  
 1800V AC for 1 min




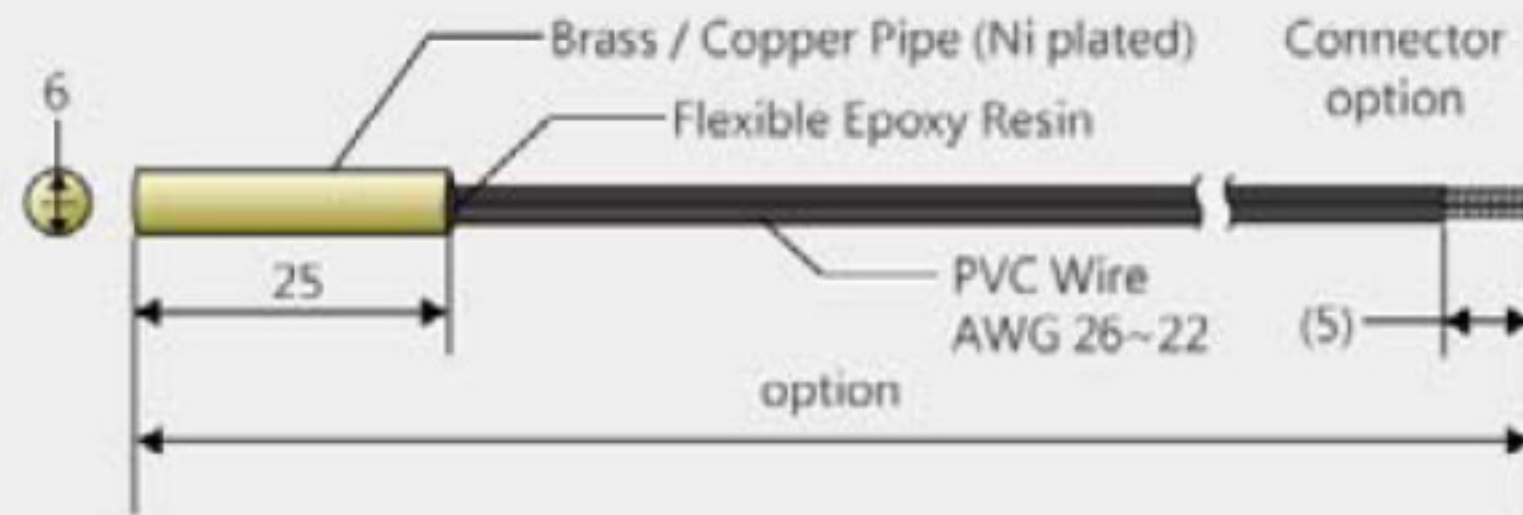


Application :  
 Air conditioner, Heat Exchanger  
 Operating temp. range :  
 -30~ +100°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 15 sec  
 Withstand voltage :  
 1800V AC for 1 min

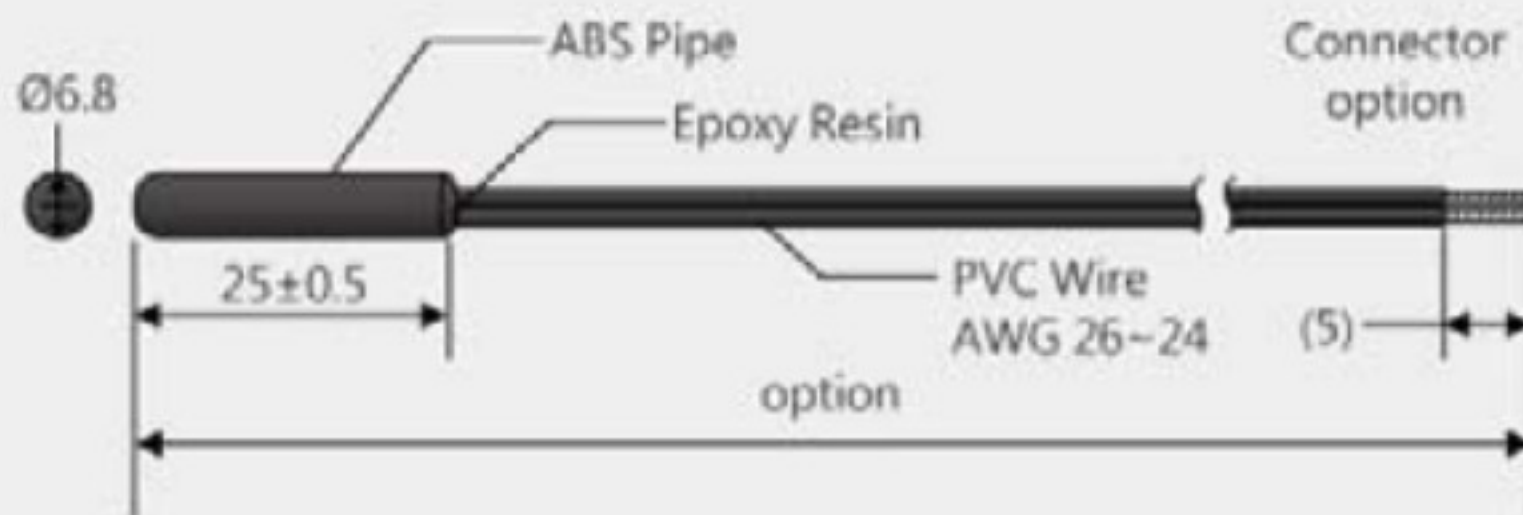


Application :  
 Air conditioner  
 Operating temp. range :  
 -40~ +80°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 25 sec  
 Withstand voltage :  
 1800V AC for 1 min

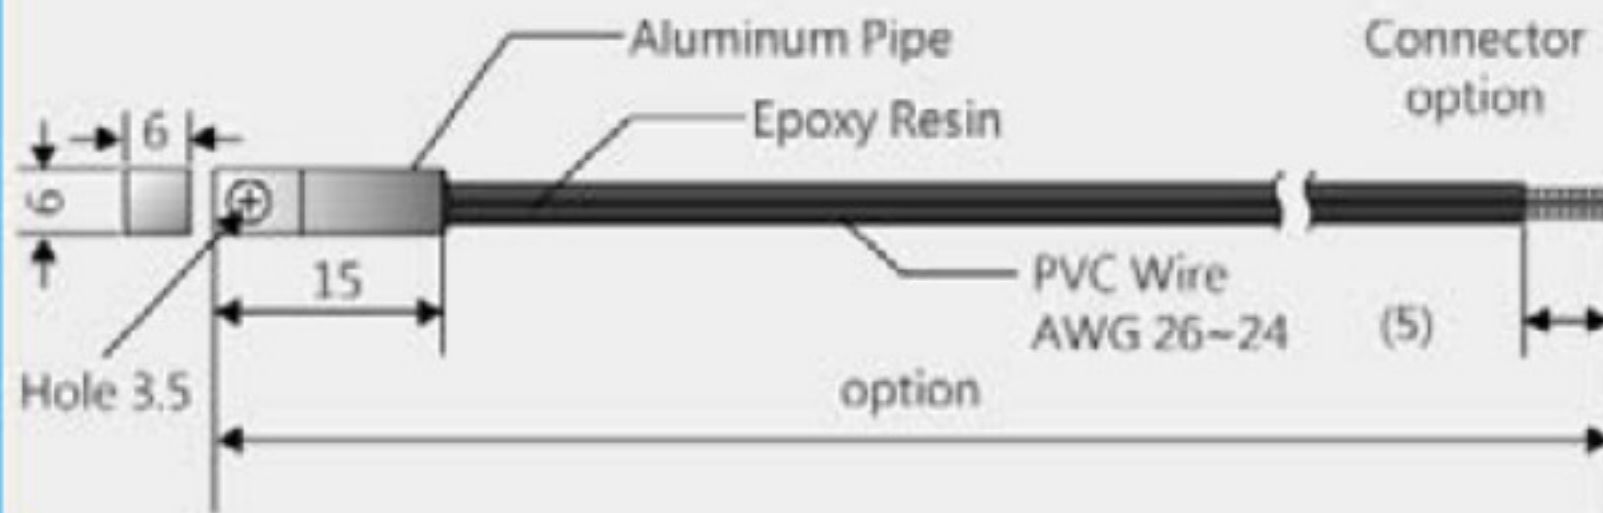

Application :  
 Air conditioner  
 Operating temp. range :  
 -30~ +120°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 16 sec  
 Withstand voltage :  
 1800V AC for 1 min

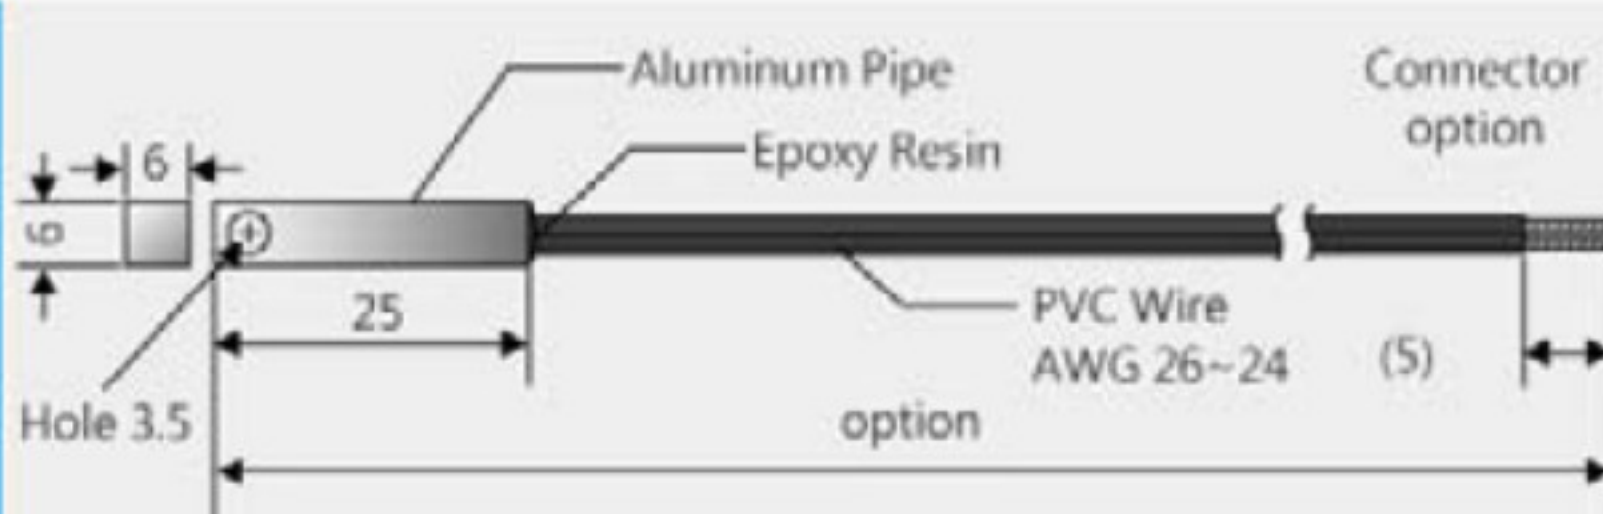

Application :  
 Air conditioner  
 Operating temp. range :  
 -30~ +120°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 16 sec  
 Withstand voltage :  
 1800V AC for 1 min

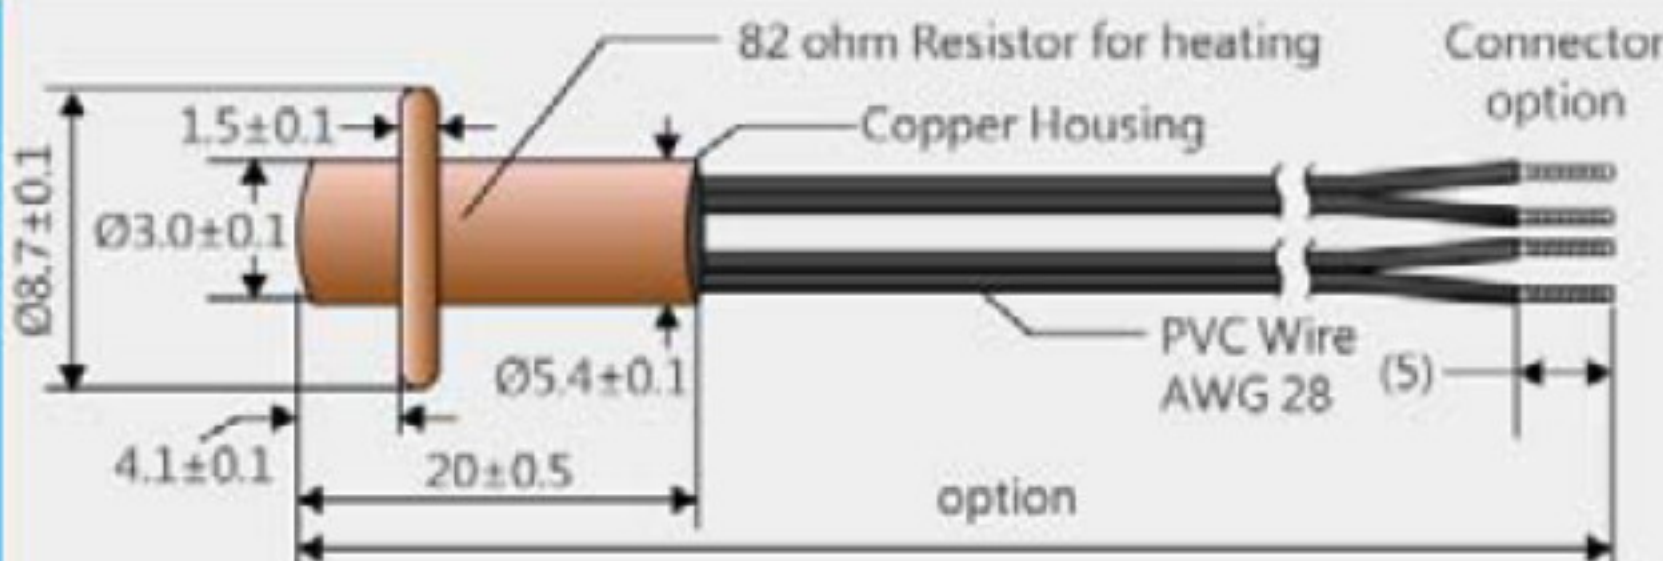


Application :  
 Water box of Air Conditioner  
 Operating temp. range :  
 -30~ +80°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 10 sec  
 Withstand voltage :  
 600V AC for 1 min





AC-E-B-01

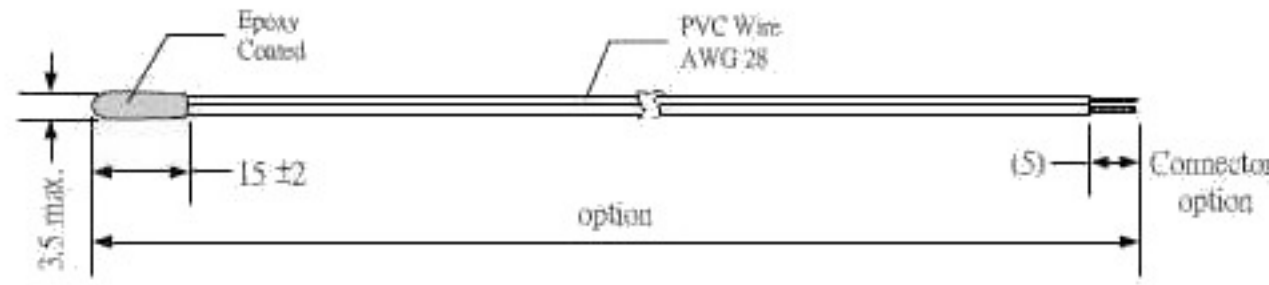


\* Application :

Air Conditioner...

Operating temp. range	-30~+100°C
Dissipation constant	Approx. 2.3mW/°C
Thermal time constant	Approx. 5.5 sec.
Withstand voltage	1000V AC for 1 min.



AC-E-B-02

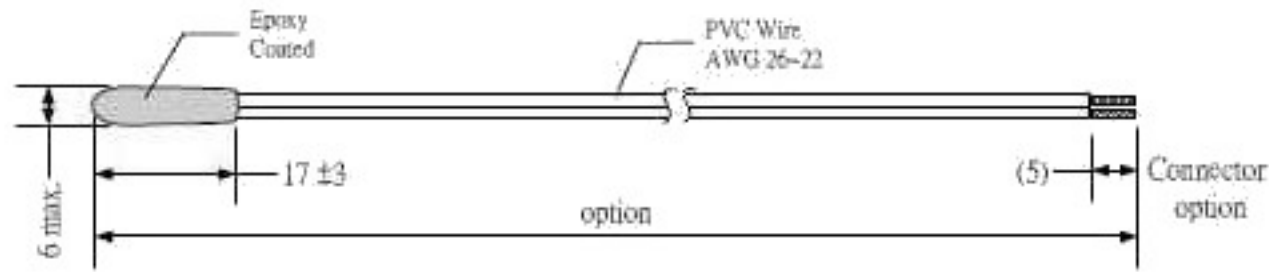


\* Application :

Air Conditioner...

Operating temp. range	-30~+100°C
Dissipation constant	Approx. 2.5mW/°C
Thermal time constant	Approx. 8 sec.
Withstand voltage	1500V AC for 1 min.



AC-M-X-01

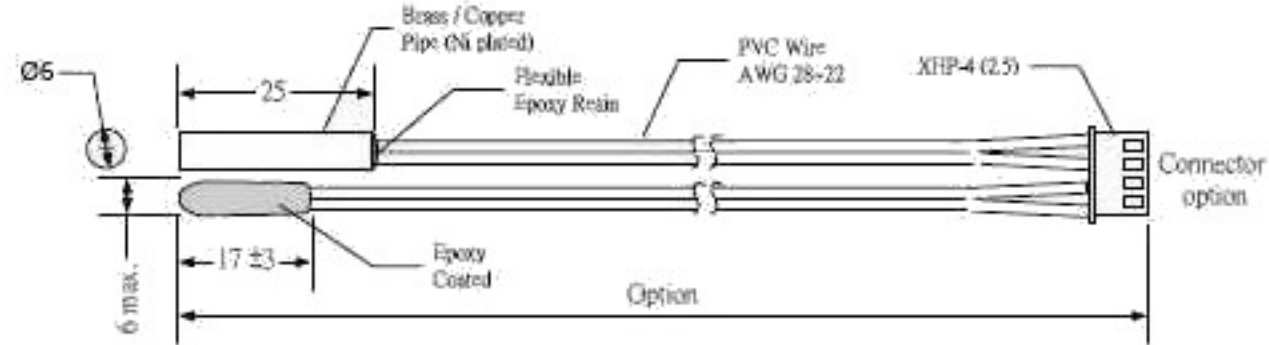


\* Application :

Air Conditioner...

Operating temp. range	-30~+100°C
Dissipation constant	Approx. 2.5mW/°C
Thermal time constant	Approx. 8 sec.
Withstand voltage	1500V AC for 1 min.



AC-M-G-01

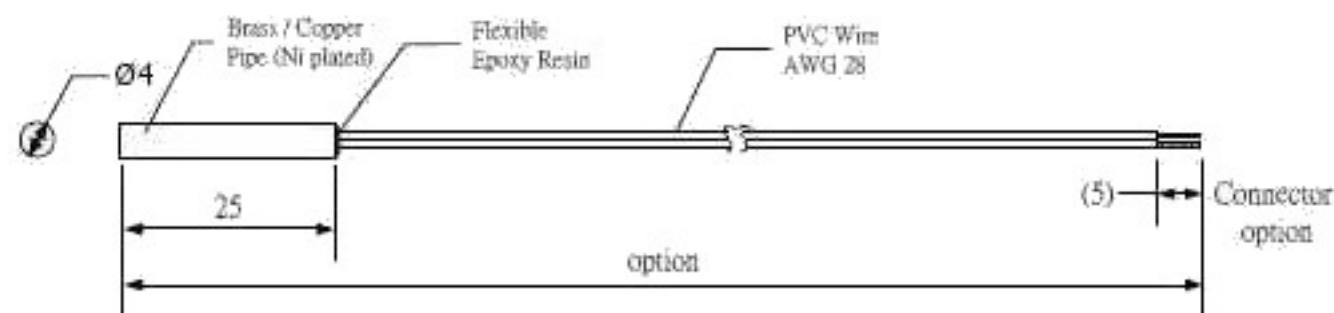


\* Application :

Air Conditioner, Heat Exchanger...

Operating temp. range	-30~+100°C
Dissipation constant	Approx. 2.5mW/°C
Thermal time constant	Approx. 8 sec.
Withstand voltage	1500V AC for 1min.



AC-M-G-02

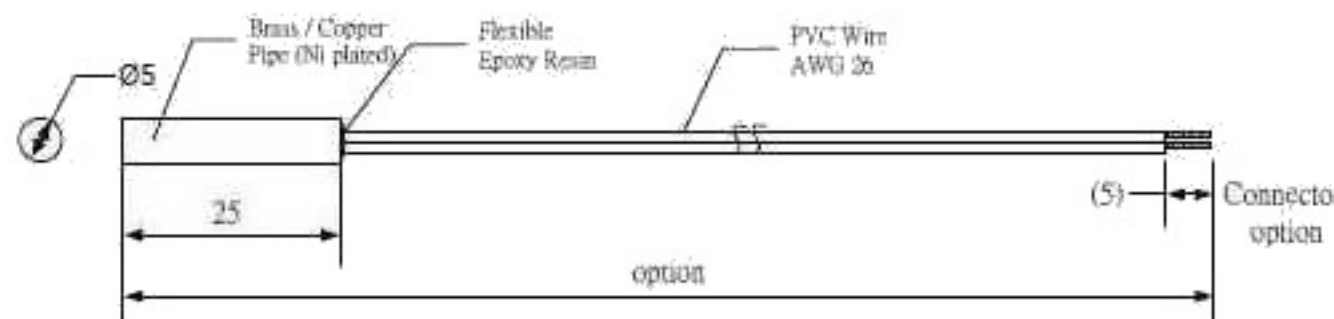


\* Application :

Air Conditioner, Heat Exchanger...

Operating temp. range	-30~+100°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 11 sec.
Withstand voltage	1800V AC for 1min.



AC-M-G-03

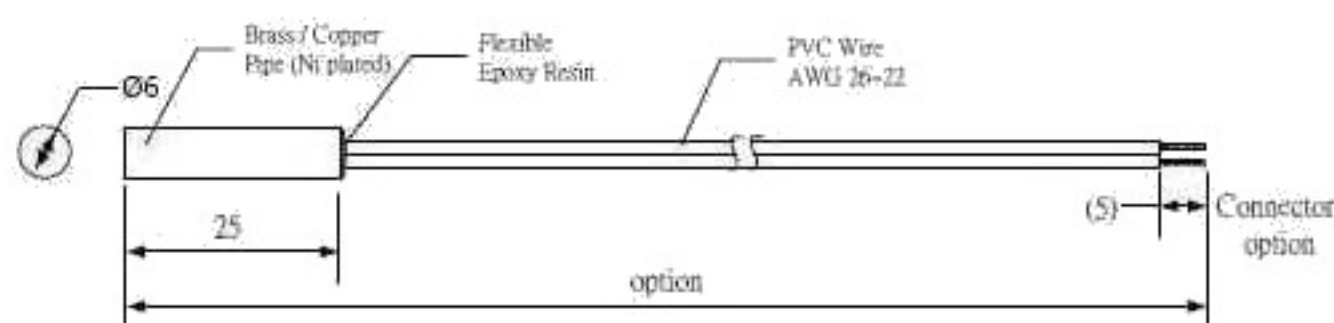


\* Application :

Air Conditioner, Heat Exchanger...

Operating temp. range	-30~+100°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 15 sec.
Withstand voltage	1800V AC for 1min.



AC-M-G-04

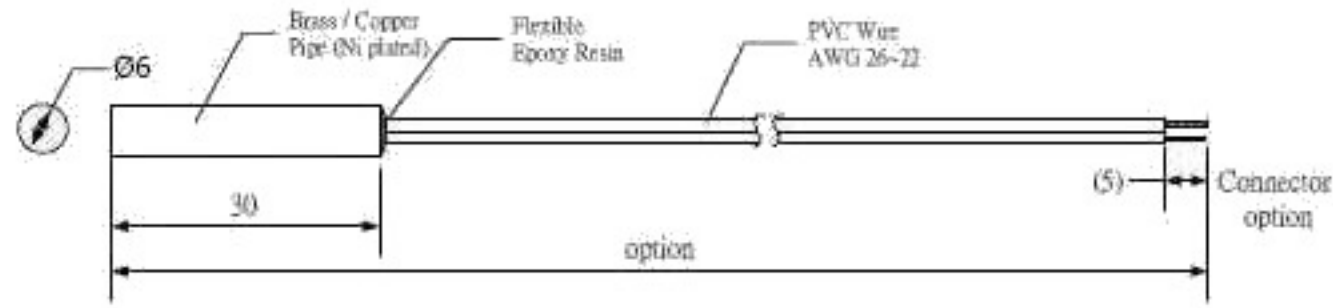


\* Application :

Air Conditioner , Heat Exchanger...

Operating temp. range	-30~+100°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 15 sec.
Withstand voltage	1800V AC for 1min.



AC-M-G-05

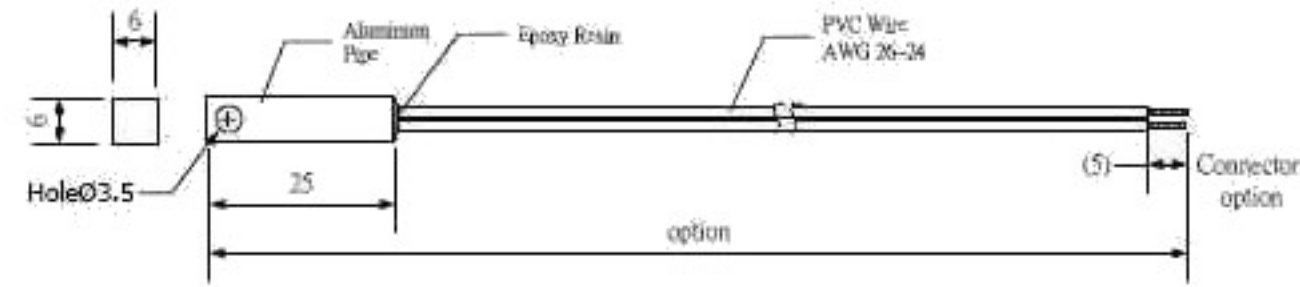


\* Application :

Air Conditioner...

Operating temp. range	-30~+120°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 16 sec.
Withstand voltage	1800V AC for 1min.



AC-M-G-06C

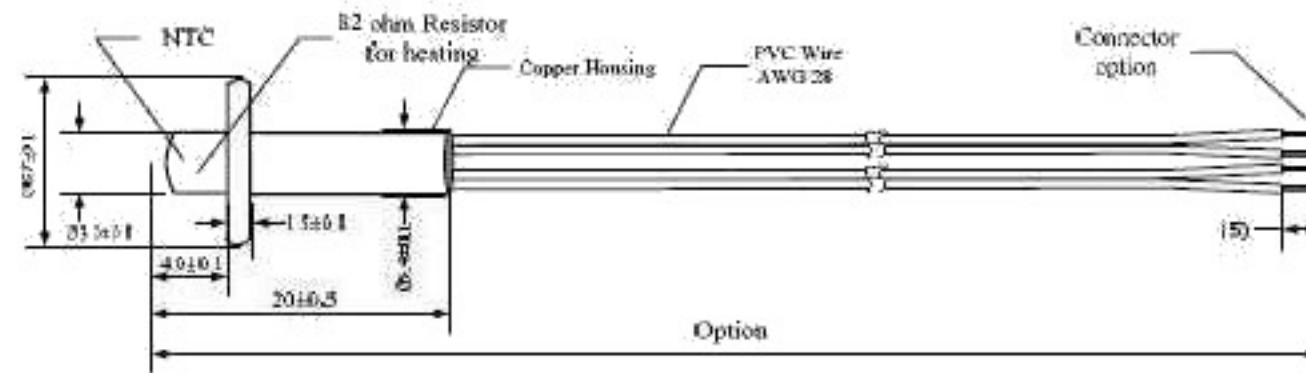

\* Application :

Water box of Air Conditioner...

Operating temp. range	-30~+80°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 10 sec.
Withstand voltage	600V AC for 1min.