






# Refrigerator/Chiller

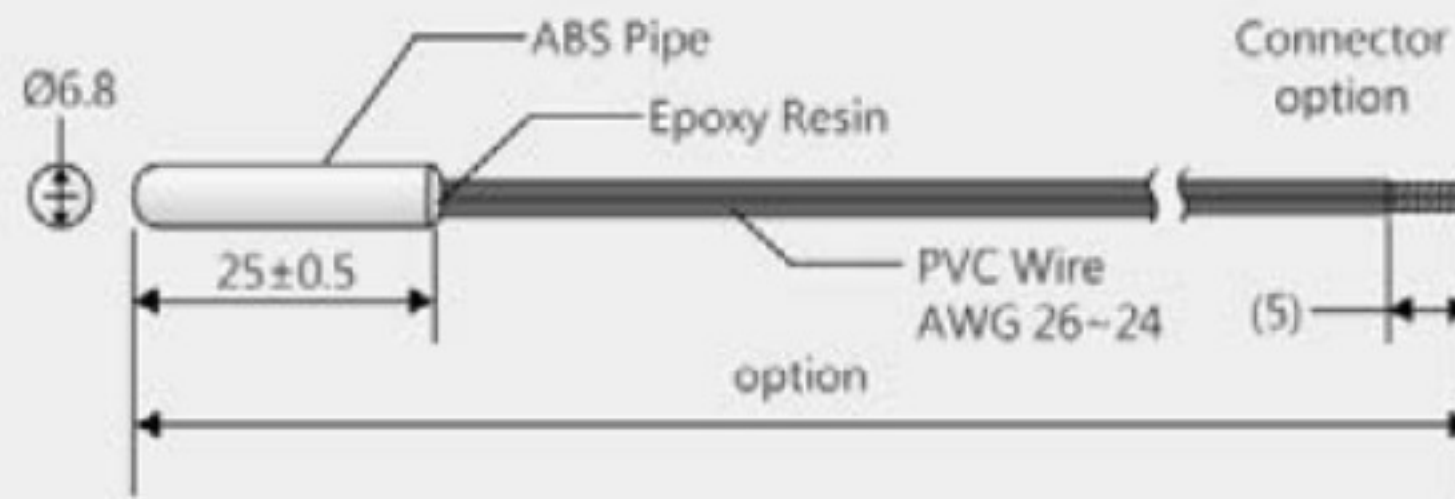


Application :  
**Refrigerator**  
 Operating temp. range :  
 -40~ +80°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 25 sec  
 Withstand voltage :  
 1800V AC for 1 min

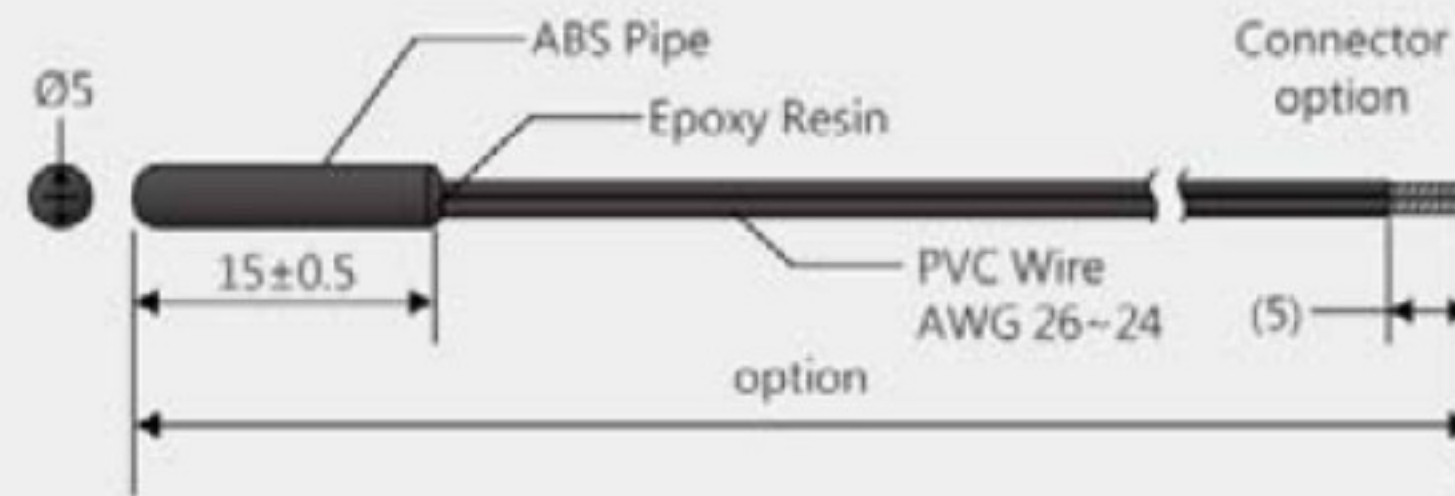


Application :  
**Refrigerator**  
 Operating temp. range :  
 -40~ +80°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 25 sec  
 Withstand voltage :  
 1800V AC for 1 min

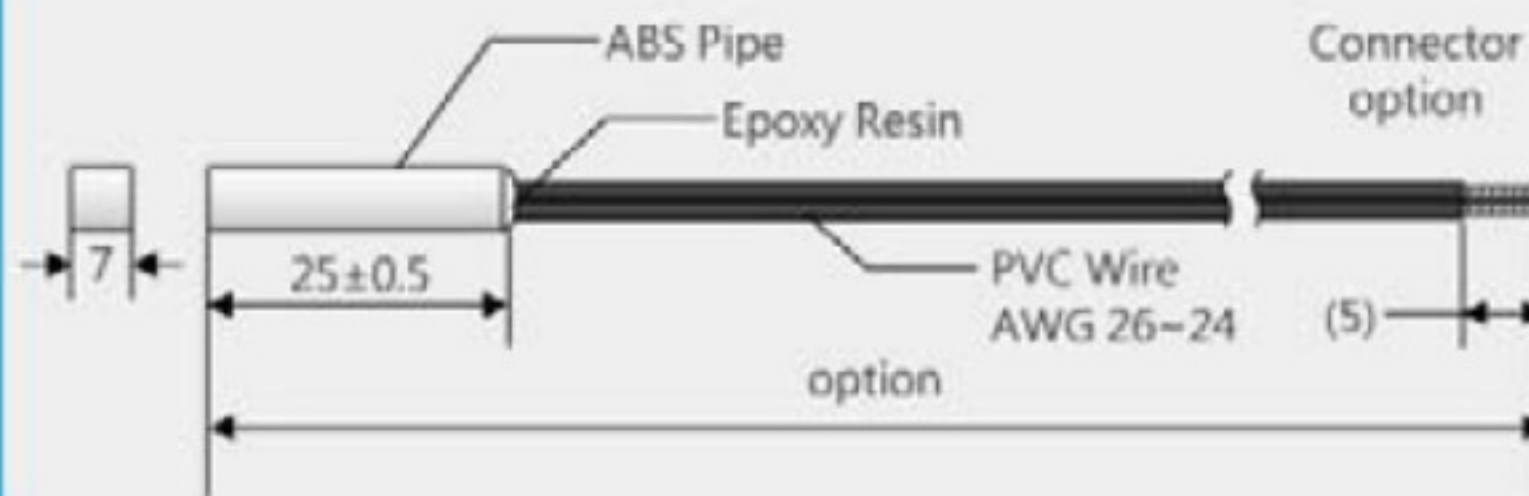


Application :  
**Refrigerator**  
 Operating temp. range :  
 -40~ +80°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 25 sec  
 Withstand voltage :  
 1800V AC for 1 min

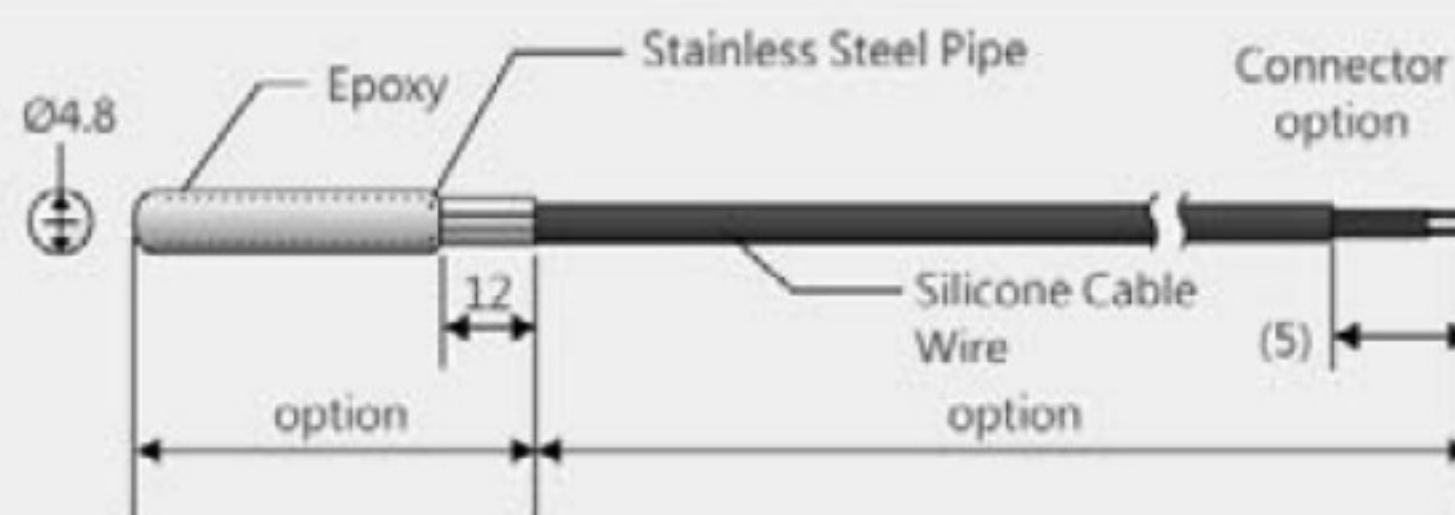


Application :  
**Refrigerator**  
 Operating temp. range :  
 -40~ +80°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 25 sec  
 Withstand voltage :  
 1800V AC for 1 min

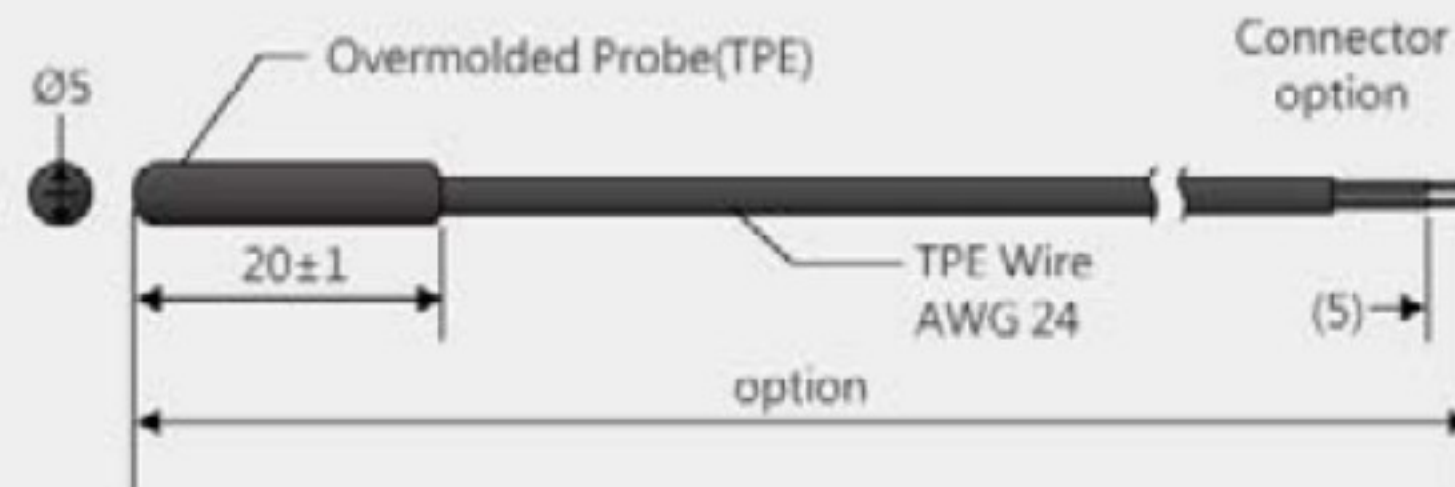


Application :  
**Refrigerator**  
 Operating temp. range :  
 -40~ +80°C  
 Dissipation constant :  
 Approx. 3mW/°C  
 Thermal time constant :  
 Approx. 35 sec  
 Withstand voltage :  
 1800V AC for 1 min

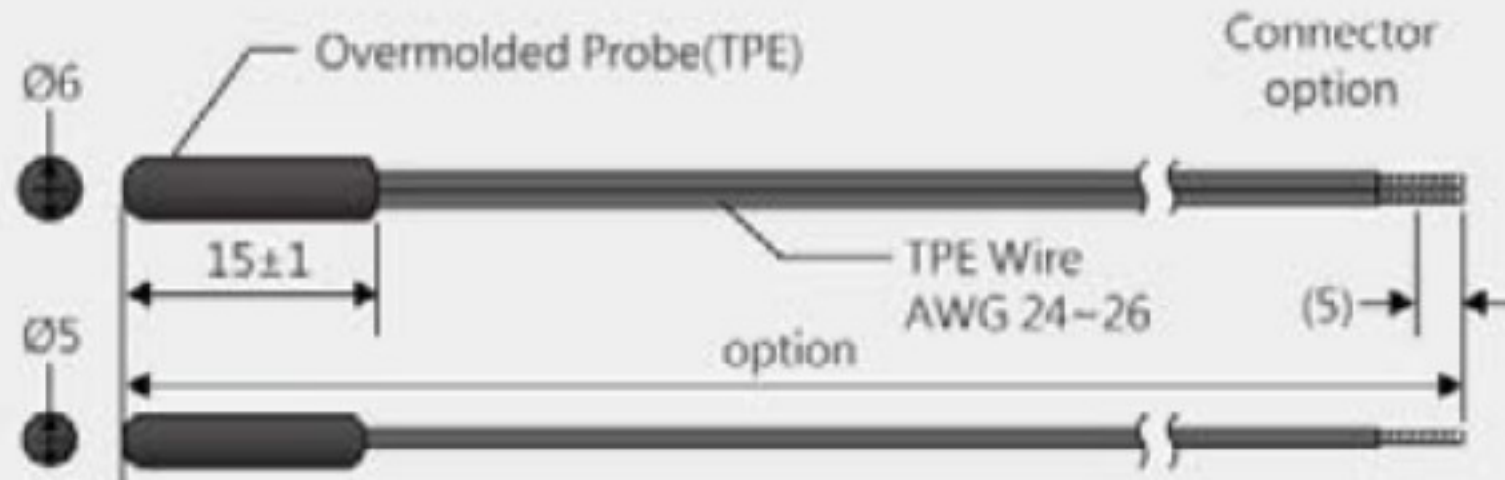

Application :	Refrigerator
Operating temp. range :	-50~ +125°C
Dissipation constant :	Approx. 2mW/°C
Thermal time constant :	Approx. 35 sec
Withstand voltage :	1800V AC for 1 min

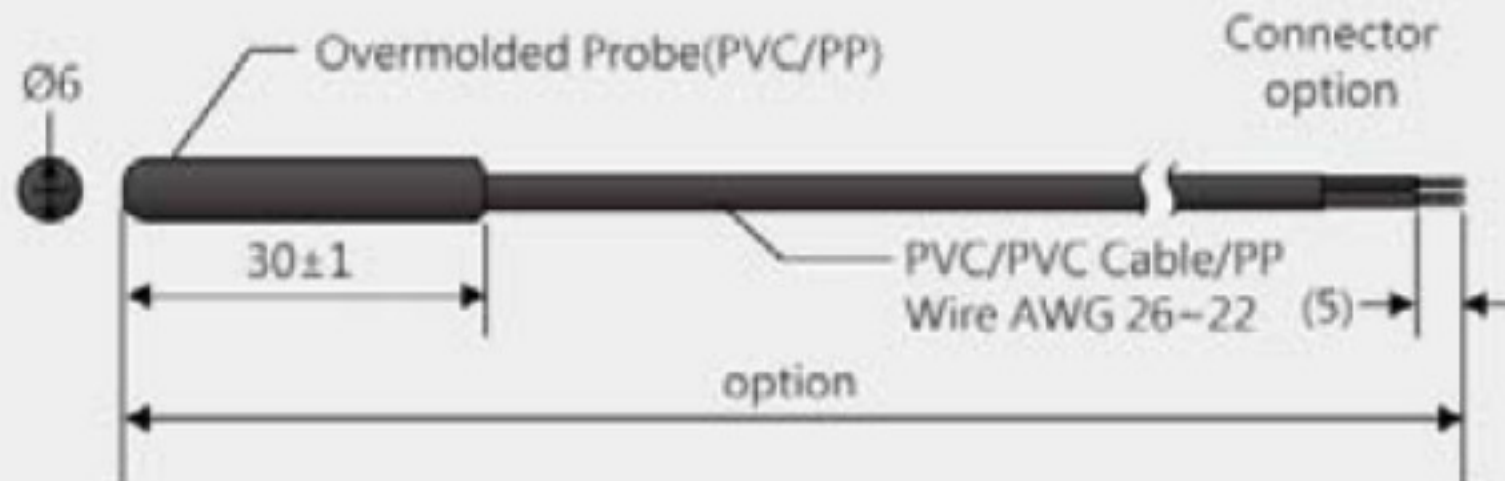


Application :	Refrigerator
Operating temp. range :	-50~ +105°C
Dissipation constant :	Approx. 2mW/°C
Thermal time constant :	Approx. 35 sec
Withstand voltage :	1800V AC for 1 min

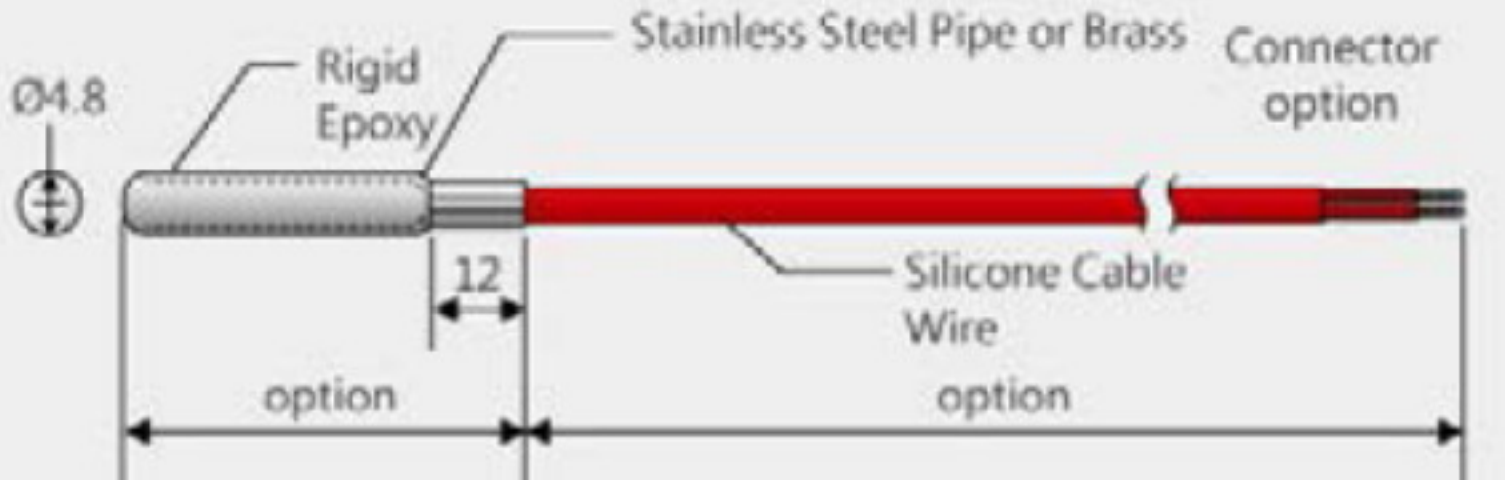

Application :	Refrigerator
Operating temp. range :	-30~ +120°C
Dissipation constant :	Approx. 2.3mW/°C
Thermal time constant :	Approx. 10 sec
Withstand voltage :	1000V AC for 1 min




Application :	Refrigerator
Operating temp. range :	-60~ +80°C
Dissipation constant :	Approx. 3mW/°C
Thermal time constant :	Approx. 20 sec
Withstand voltage :	1800V AC for 1 min

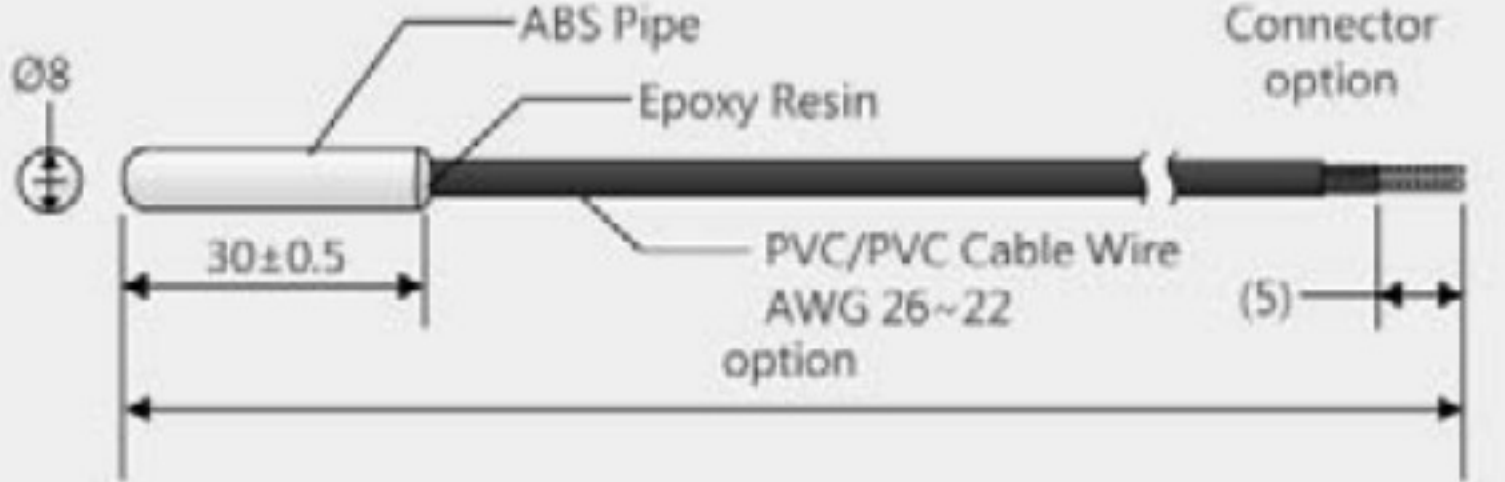

Application :	Refrigerator
Operating temp. range :	-40~ +80°C
Dissipation constant :	Approx. 3mW/°C
Thermal time constant :	Approx. 25 sec
Withstand voltage :	1800V AC for 1 min



FG-M-G-02

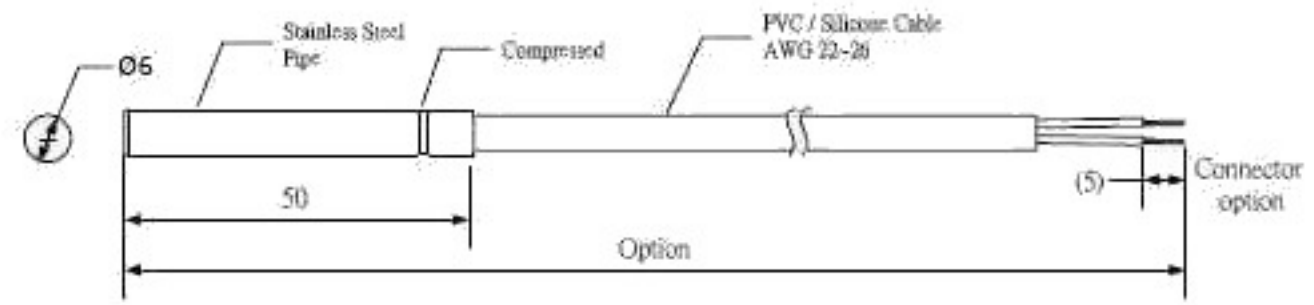


\* Application :

Cooling Water System...	
Operating temp. range	-60~+80°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 20 sec.
Withstand voltage	1800V AC for 1min.



**FG-E-W-01**

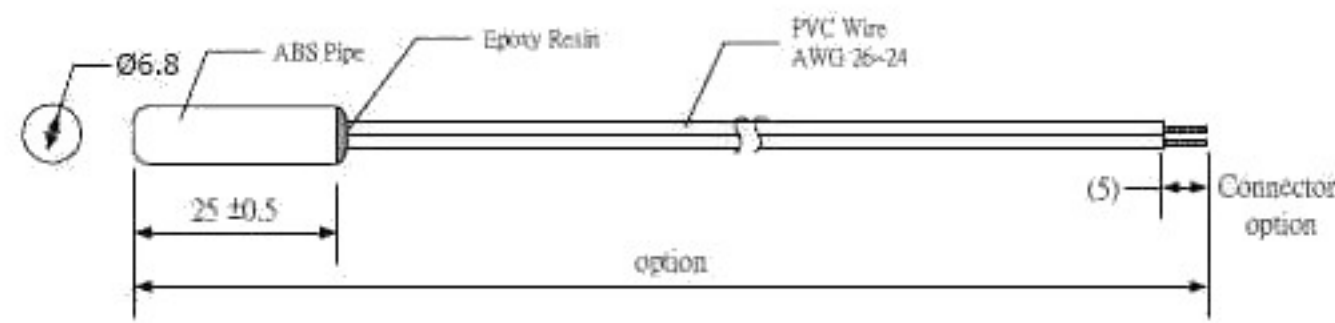


\* Application :

Refrigerator...

Operating temp. range	-40~+80°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 25 sec.
Withstand voltage	1800V AC for 1min.



**FG-E-B-01**

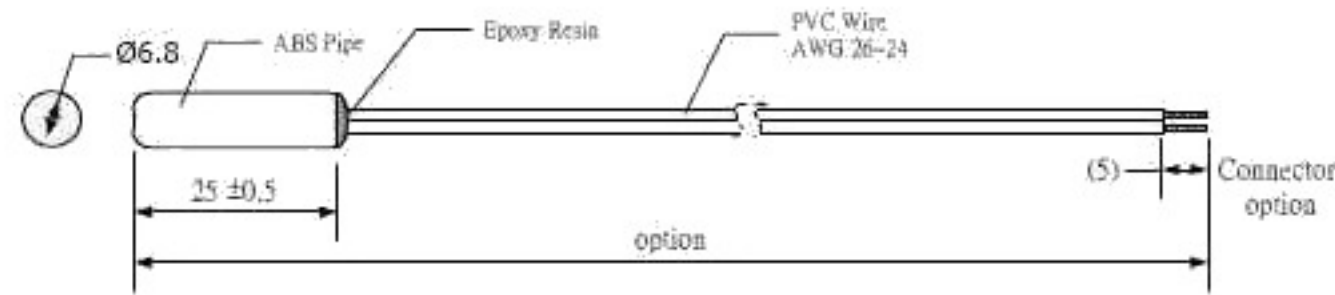


\* Application :

Refrigerator...

Operating temp. range	-40~+80°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 25 sec.
Withstand voltage	1800V AC for 1min.



**FG-E-W-02**

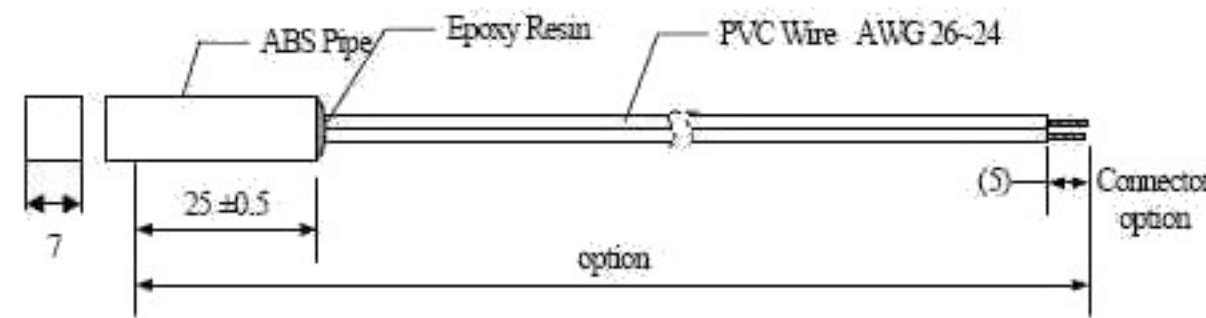


\* Application :

Refrigerator...

Operating temp. range	-40~+80°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 25 sec.
Withstand voltage	1800V AC for 1min.



**FG-E-B-02**

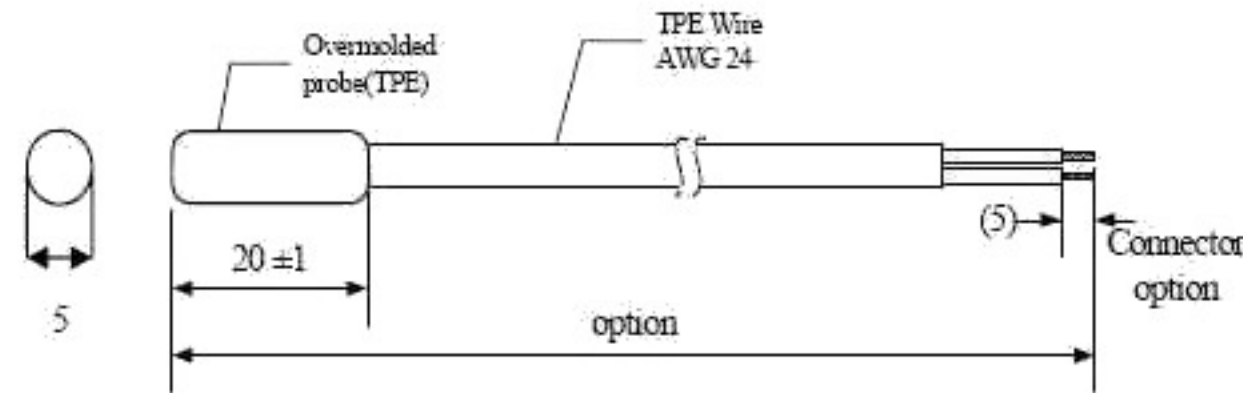


\* Application :

Operating temp. range	-50~+105°C
Dissipation constant	Approx. 2mW/°C
Thermal time constant	Approx. 35 sec.
Withstand voltage	1800V AC for 1 min.



**FG-E-B-03**

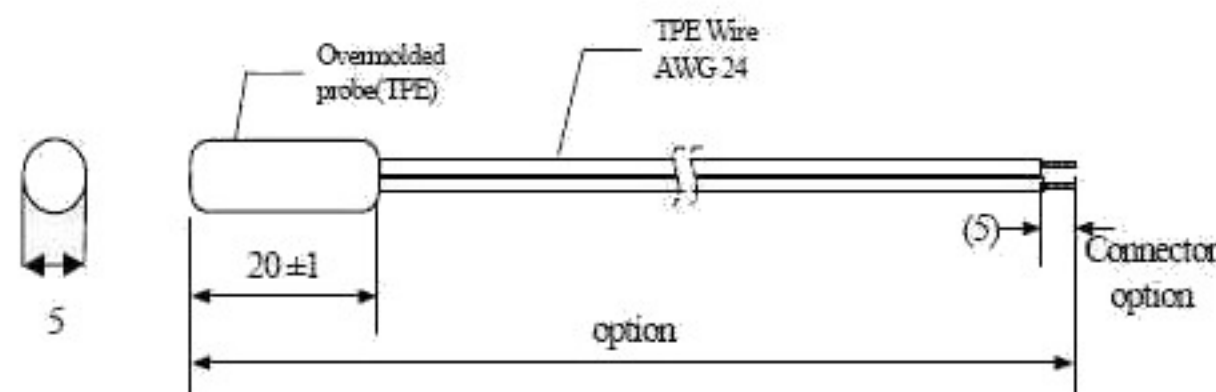


\* Application :

Operating temp. range	-50~+105°C
Dissipation constant	Approx. 2mW/°C
Thermal time constant	Approx. 35 sec.
Withstand voltage	1800V AC for 1 min.



**FG-M-G-01**

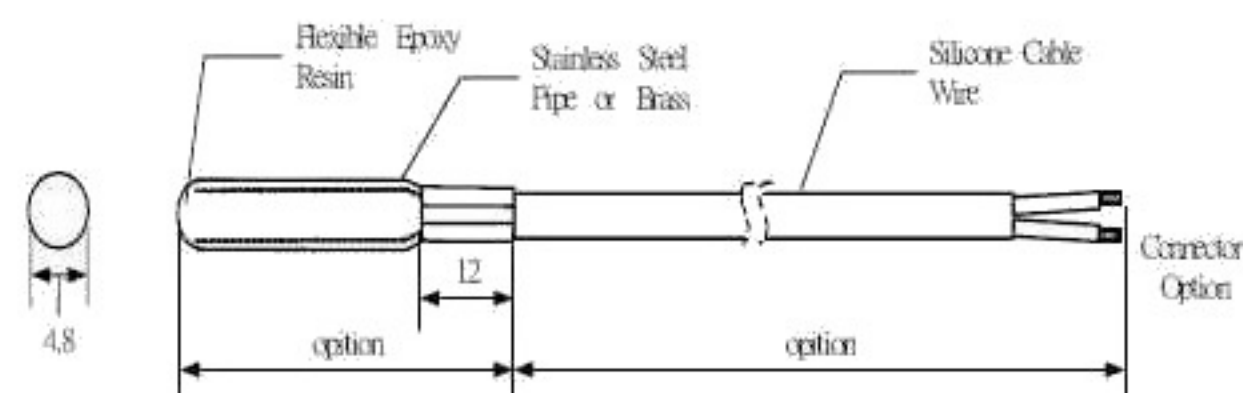

\* Application :

Operating temp. range	-30~+120°C
Dissipation constant	Approx. 3mW/°C
Thermal time constant	Approx. 10sec.
Withstand voltage	1000V AC for 1 min.