


Type	Off Temp. (°C)	On Temp. (°C)	Electrical Rating	Endurance(Resistive load)
H2/11-18/8/E324B34	18±3	8±3	DC 24V / 10A	Min. 10,000 cycles

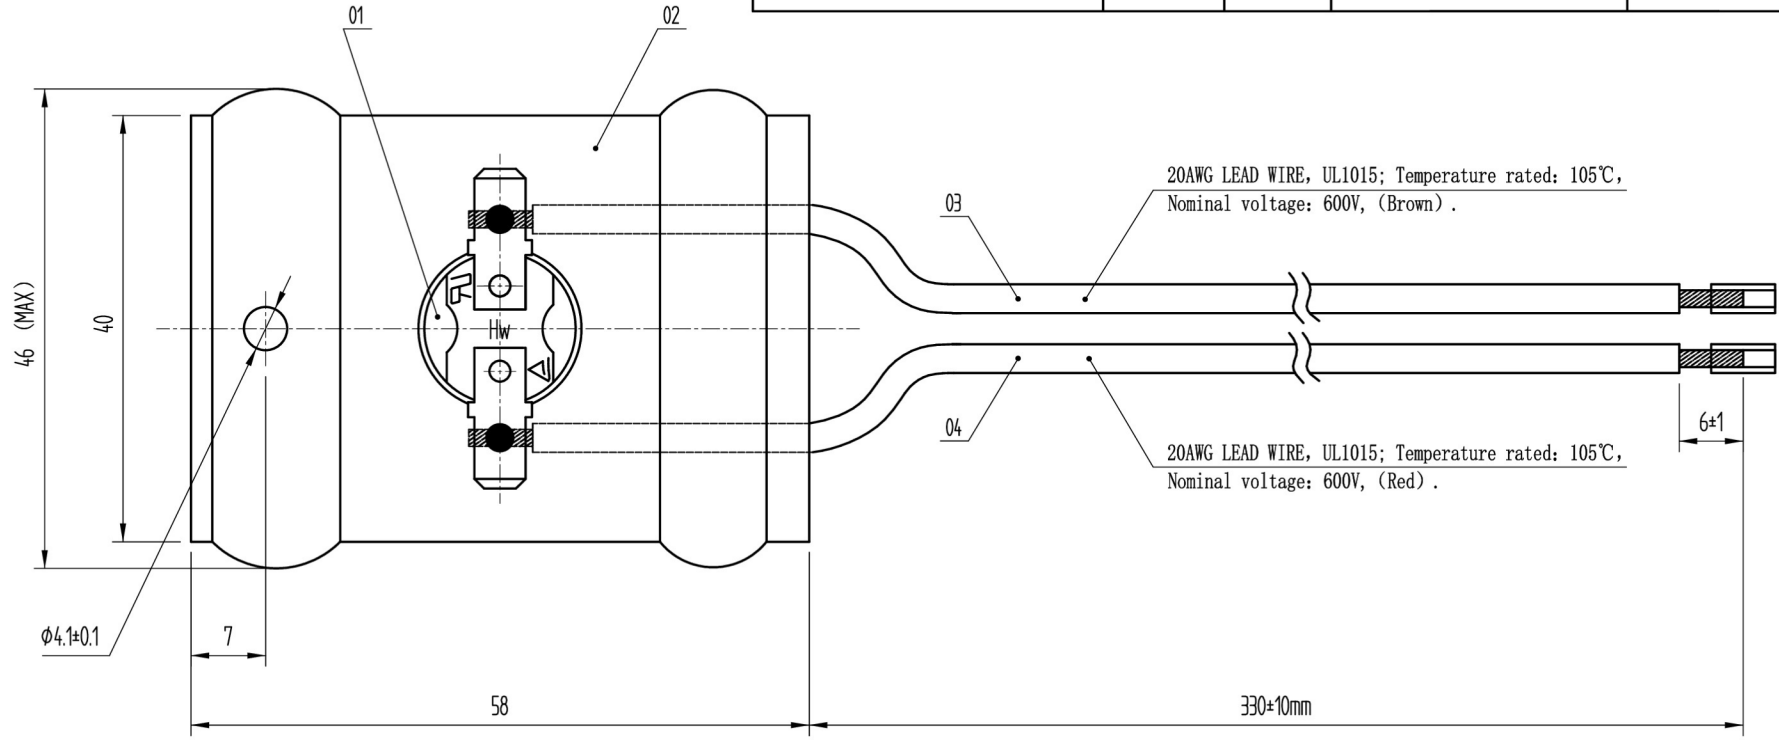

Specification

1. Switch type: single pole and single throw (S.P.S.T); Normal close (N.C);
2. Max ambient temperature: T105;
3. Resistance between terminals: Max. 50mΩ at DC5V/0.25A;
4. Insulation resistance: Min. 100MΩ with DC500V between terminals and cap;
5. Dielectric strength: 1,500VAC @ 1 min. between terminals and cap without breakdown;
6. Packing: 1 carton: 200 pcs × 4 boxes, carton size: 470×340×220mm.
7. Standards According: GB14536.1-2008, GB14536.10-2008, GB/T 22687-2008, EN60730-1, EN60730-2-9;
8. This product is conformity to the directives of 2011/65/EU RoHS and 1907/2006/EC REACH.

04	PVC Wires 2	1	20AWG, UL 1015, Wires Length: 300mm, (Red)			
03	PVC Wires 1	1	20AWG, UL 1015, Wires Length: 300mm, (Brown)			
02	Plastic sealed sheath	1	VINYL TUBE			
01	Thermostat	1	H2/11			
No.	Parts Name	Qty.	Material	Remark		
			Snap Action Thermostat	SN: 20191207-01		
				Sample	Qty.	Weight
Mark	Qty.	Content	Signature			
Designed				Page 1 of 1 Page		
Reviewed				H2/11		
Approved				絃 緯 科 技 Honest-Well Co., Ltd.		

Free tolerance table

Dim. range (mm)	0~9	9.1~16	16.1~30	>30
Tolerance	±0.2	±0.3	±0.4	±0.5

Old No.

Base No.

Signature