


Mark	Amount	Subjects of Change	Edition	Date
		Establishment	1.0	Sep. 09. 2019

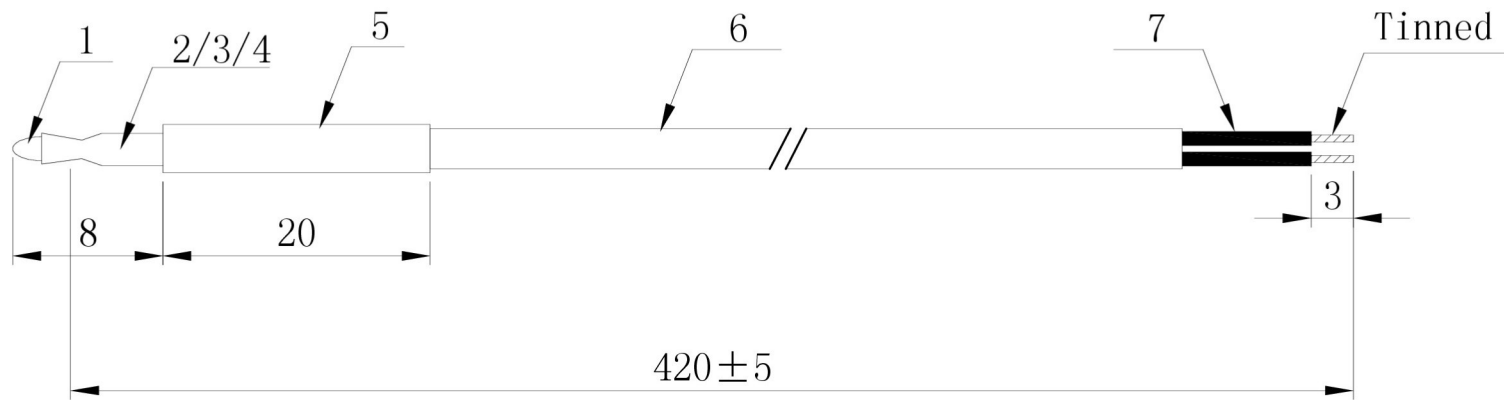

Items	Ratings	Remarks	
1	Rated zero-power resistance R25°C	10.0KΩ	Zero-power resistance is measured at 25°C
2	Tolerance of rated zero-power resistance R25	±1%	
3	Rated B-value B25/50	3950K	B-value is calculated with the zero-power resistance values measured at 25°C and 50°C
4	Tolerance of rated B-value B25/50	±1%	
5	Temperature range	-40°C~200°C	

NO.	PART NAME	Q' TY	Material	Remark
7	Wire	2	UL 1332-28AWG Cable 200°C	Black
6	Tube	1	12L PTFE tube	Black
5	Tube	1	φ2.5mm PTFE Shrink tube	Black
4	Tube	1	φ1.5mm PTFE Shrink tube	Trandparent
3	Tube	1	φ1.0mm PTFE Shrink tube	Trandparent
2	Tube	1	φ0.6×0.04mm Polyimide tube	Brown
1	Thermistor	1	R25°C=10KΩ ±1% B25/50°C=3950K±1%	Glass

Produced by	Li yan qiu		Drawing No. TYP19090901 Unit: mm Date: Sep. 09. 2019
Checked by	Liu iaoying		
Designed by	Dai xiaojun		
Approved by	Dai xiaojun		
		HW P/N	HW01039FBD420
		Customer P/N	

A						
B						
C						
D						
E						
F						
	1	2	3	4	5	6
						7