

Push Button Switch LC83 Series



SPECIFICATION

- Electrical Rating : 15A 250VAC/125VAC(UL)
16(4)A/10(4)A 250VAC(VDE)
- Mechanical life: Over 30000 cycles
- Electrical life: Over 10000 cycles
- Contact resistance: <math><20\text{m}\Omega</math>
- Insulation resistance: >1000M Ω
- High voltage resistance: >1500V 1 min.
- Ambient temperature: Terminal side -20 to +105 $^{\circ}\text{C}$
Actuating side -20 to +55 $^{\circ}\text{C}$
- Storage temperature: -30 to +80 $^{\circ}\text{C}$ Max
- Atmospheric humidity: Max.85%
- Actuating force: 3 to 6N(Depends on different switch function)
- Flammability: 94V-2
- Temperature rise at the terminal: Max 30 $^{\circ}\text{C}$ (UL1054)
- Solder ability of terminal: Max 350 $^{\circ}\text{C}$, 3s

MATERIALS

- Housing: PA66
- Rocker: PC
- Contacts: Silver alloy
- Terminal: Copper silver plated
- Spring: SUS
- Movable Arm: Copper silver plated
- Lamp: Neon Lamp, Tungsten Lamp
- Bracket: PA66

HOW TO ORDER


LC83	01	K	K	E	T	0	C	A																																																														
Series	Switch Function	Housing Color	Actuator Color	Marking	Terminal Type	Lamp Voltage	Safety Approval	High Rating																																																														
Series				E No Marking																																																																		
	<table border="1"> <tr><td>01</td><td>ON - OFF</td></tr> <tr><td>02</td><td>(ON) - OFF</td></tr> <tr><td>03</td><td>ON-OFF (with lamp)</td></tr> <tr><td>04</td><td>(ON) - OFF(with lamp)</td></tr> <tr><td>05</td><td>ON - OFF</td></tr> <tr><td>06</td><td>(ON) - OFF</td></tr> <tr><td>07</td><td>ON-OFF(with lamp)</td></tr> <tr><td>08</td><td>(ON)-OFF(with lamp)</td></tr> </table>	01	ON - OFF	02	(ON) - OFF	03	ON-OFF (with lamp)	04	(ON) - OFF(with lamp)	05	ON - OFF	06	(ON) - OFF	07	ON-OFF(with lamp)	08	(ON)-OFF(with lamp)	<table border="1"> <tr><td>G</td><td>Gray</td></tr> <tr><td>W</td><td>White</td></tr> <tr><td>K</td><td>Black</td></tr> </table>	G	Gray	W	White	K	Black	<table border="1"> <tr><td>G</td><td>Gray</td></tr> <tr><td>W</td><td>White</td></tr> <tr><td>K</td><td>Black</td></tr> </table>	G	Gray	W	White	K	Black	<table border="1"> <tr><td>G</td><td>Gray</td></tr> <tr><td>W</td><td>White</td></tr> <tr><td>K</td><td>Black</td></tr> <tr><td>O</td><td>Orange</td></tr> <tr><td>R</td><td>Red</td></tr> <tr><td>Y</td><td>Yellow(illu)</td></tr> <tr><td>M</td><td>Green(illu)</td></tr> <tr><td>D</td><td>Red(illu)</td></tr> <tr><td>F</td><td>Blue(illu)</td></tr> </table>	G	Gray	W	White	K	Black	O	Orange	R	Red	Y	Yellow(illu)	M	Green(illu)	D	Red(illu)	F	Blue(illu)		<table border="1"> <tr><td>0</td><td>No lamp</td></tr> <tr><td>1</td><td>125V AC</td></tr> <tr><td>2</td><td>250V AC</td></tr> <tr><td>3</td><td>12V DC</td></tr> <tr><td>4</td><td>24V DC</td></tr> </table>	0	No lamp	1	125V AC	2	250V AC	3	12V DC	4	24V DC	<table border="1"> <tr><td>C</td><td>4 Safety Approvals</td></tr> <tr><td>E</td><td>None Approvals</td></tr> </table>	C	4 Safety Approvals	E	None Approvals	<table border="1"> <tr><td>A</td><td>16A 250VAC (VDE ONLY)</td></tr> </table>	A	16A 250VAC (VDE ONLY)
01	ON - OFF																																																																					
02	(ON) - OFF																																																																					
03	ON-OFF (with lamp)																																																																					
04	(ON) - OFF(with lamp)																																																																					
05	ON - OFF																																																																					
06	(ON) - OFF																																																																					
07	ON-OFF(with lamp)																																																																					
08	(ON)-OFF(with lamp)																																																																					
G	Gray																																																																					
W	White																																																																					
K	Black																																																																					
G	Gray																																																																					
W	White																																																																					
K	Black																																																																					
G	Gray																																																																					
W	White																																																																					
K	Black																																																																					
O	Orange																																																																					
R	Red																																																																					
Y	Yellow(illu)																																																																					
M	Green(illu)																																																																					
D	Red(illu)																																																																					
F	Blue(illu)																																																																					
0	No lamp																																																																					
1	125V AC																																																																					
2	250V AC																																																																					
3	12V DC																																																																					
4	24V DC																																																																					
C	4 Safety Approvals																																																																					
E	None Approvals																																																																					
A	16A 250VAC (VDE ONLY)																																																																					
					T Quick connect tab type																																																																	




Option of switch function

Item No	POLES&THROWS	Push button position ():Momentary		
		Down	Center	Up
LC8301	SPST	ON	None	OFF
LC8302	SPST	(ON)	None	OFF
LC8303	SPST(with lamp)	ON	None	OFF
LC8304	SPST(with lamp)	(ON)	None	OFF
LC8305	DPST	ON	None	OFF
LC8306	DPST	(ON)	None	OFF
LC8307	DPST(with lamp)	ON	None	OFF
LC8308	DPST(with lamp)	(ON)	None	OFF

Dimension

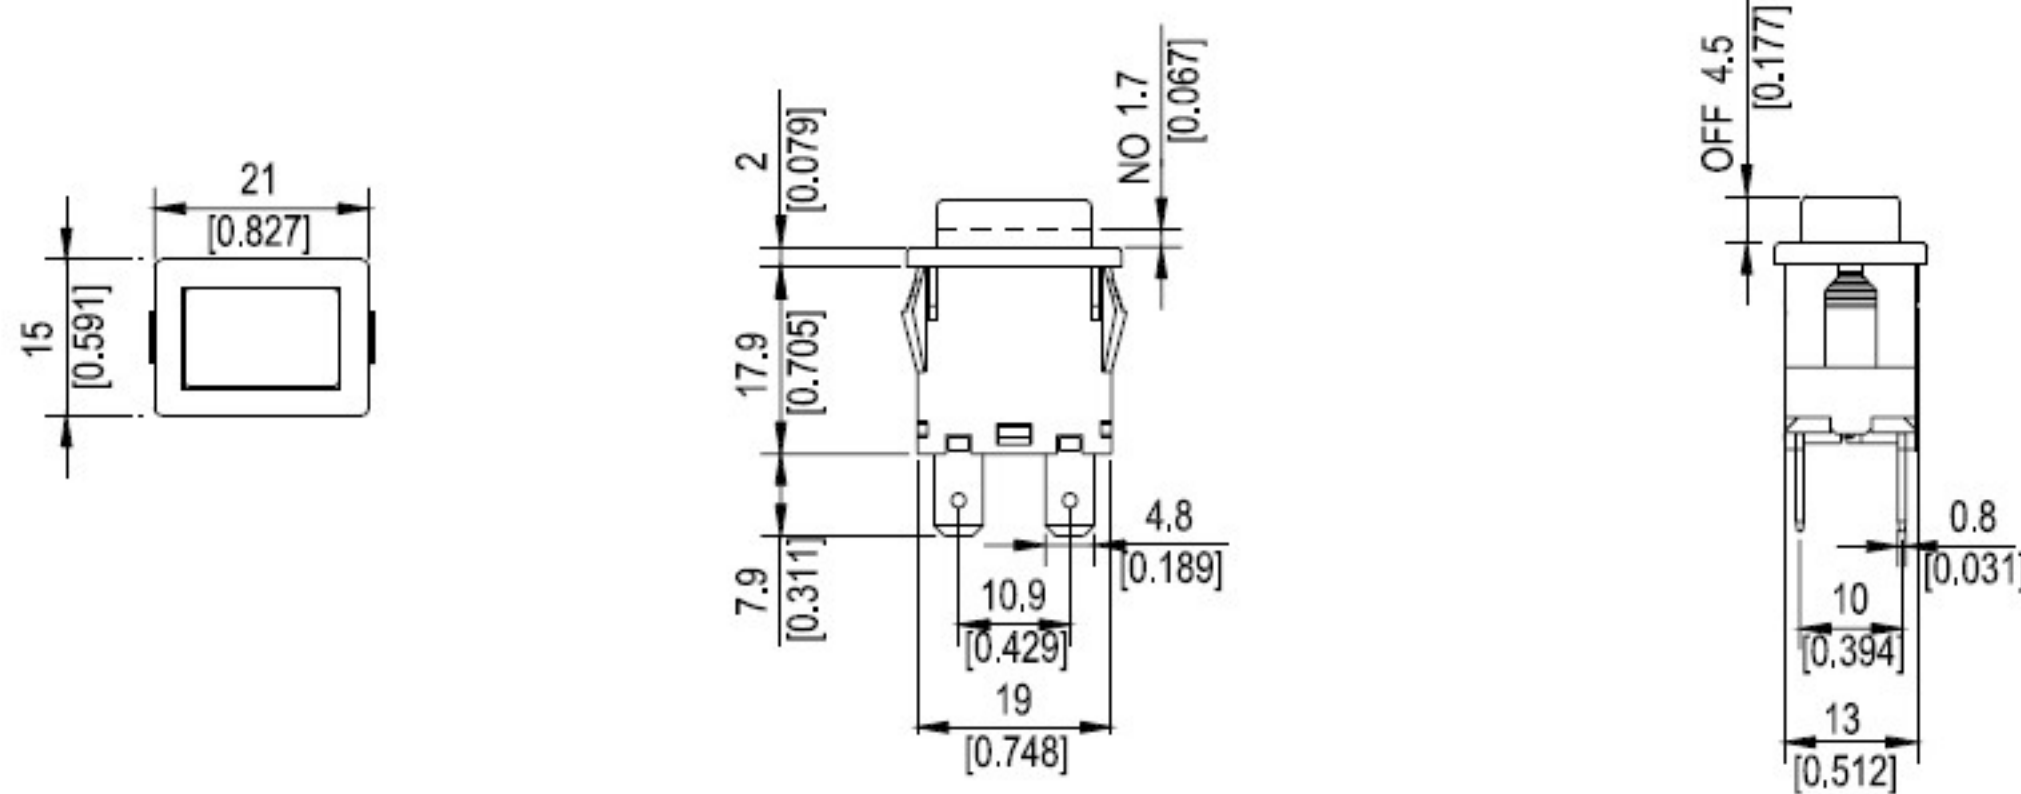


Panel cut out

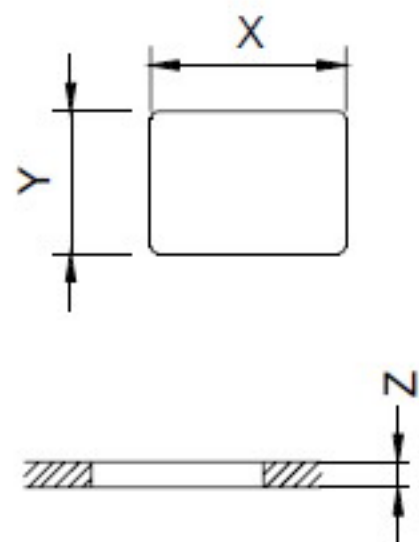

Z	Y	X
0.70~1.25	12.90~13.00	19.10~19.20
1.25~2.00	12.90~13.00	19.30~19.40
2.00~3.00	12.90~13.00	19.50~19.60

Circuit of switch with lamp

Circuits for LC8303, LC8304

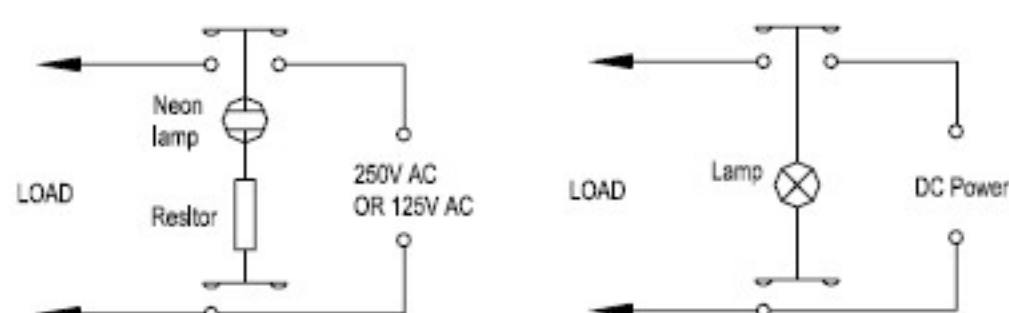

Circuits for LC8307, LC8308

