


- 1、 All dimensions in mm [Inch]
- 2、 General tolerance :>10±0.4  
<10±0.25
- 3、 Electrical rating : 10A 250VAC & 16A 125VAC
- 4、 Contact resistance : <20mΩ(initial)
- 5、 Insulation resistance : >1000MΩ(500VDC between open contacts)
- 6、 Dielectric strength : >1500V 1 minute
- 7、 Mechanical life : >30000 cycles
- 8、 Electrical life: >10000 cycles
- 9、 Temperature rise at the terminal : Max.30℃
- 10、 Solder ability of terminal: Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)
- 11、 Any Cd ,Pb and Hg etc and their compounds do not include in this product
- 12、 Ambient temperature: T105
- 13、 Ambient humidity: Max.85%

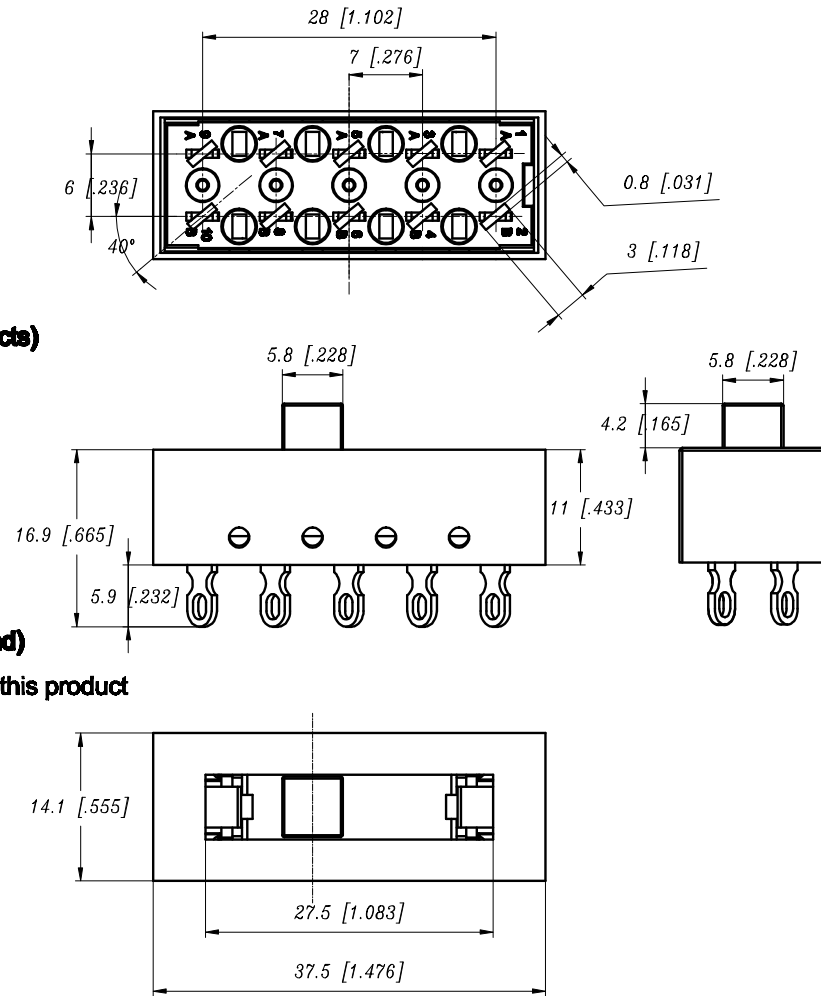

Color	Housing	Actuator
K(Black)	✓	✓
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(II. Green)		
F(III. Blue)		
T(II. White)		
D(III. Red)		

POLE FUNCTION	OPTIONS OF FUNCTION			
	1	2	3	4
DP4T	1A-3A 2B-4B	3A-5A 4B-6B	5A-7A 6B-8B	7A-9A 8B-10B

\* We keep the right to alter the dimension without notice.

Part NO.	SA325KKEW0C	Honest-Well Co., Ltd.					
Dwg. NO.	S3A四档						
Series NO.	S1	Drawing	Xiejiming	Auditing	Luyancho		
Dwg.Name	Specification	Scale	2:1	Date	05-06-13	Page	