


O/FORCE

- 180gf
- 250gf
- 350gf
- _____
- _____
- _____


SCHEMATIC



General specifications

Circuit : PUSH ON
 Rating : D.C. 12V 50mA
 Contact R.[max] : D.C. 5V 1A 30mΩ
 Insulation R.[min] : D.C. 500V 100MΩ
 Withstand VOL. : A.C. 250V 1minute
 Operating force : NA
 Life cycle[max] : 300,000 CYCLES

LAYOUT

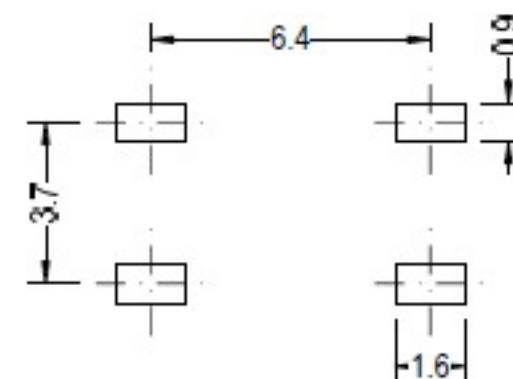

MODEL NO.

KNOB(H)

- TS-014-1.5 1.5 mm(Stem: Metal)
- TS-014-1.6 1.6 mm(Stem: Plastic)
- TS-014-4.3 4.3 mm(Stem: Plastic)

Hw 紘緯科技
 誠 信 科 技

Honest-Well Co., Ltd.

www.honest-well.com.tw

比例 SCALE N/A

單位 DIMENSION m m

DO NOT SCALE DRAWING
 TOLERANCES UNLESS OTHERWISE

UP TO 10 ±0.3
 ABOVE 10 TO 100 ±0.5
 ABOVE 100 ±0.8
 ANGULAR DIMENSIONS ±5°

品名 TITLE

TACT SWITCH

型號 MODEL


TS-014 SERIES

繪圖
DRAWN

MKL 2006/05/26

核准
APPROVED

HSH 2006/05/26



版次
REVISION

A

日期
DATE

2006/05/26