


Underfloor Heating Probe



APPLICATION

R - T Table

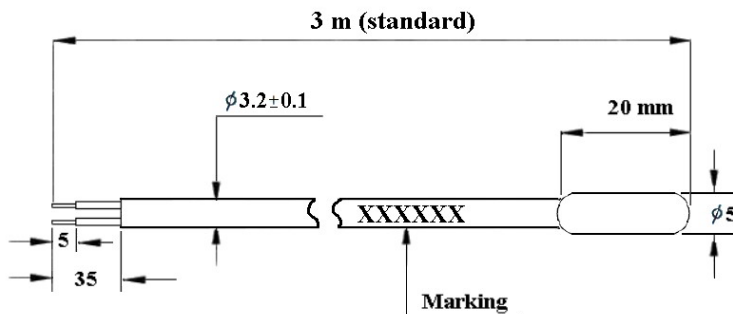

FEATURE

- Degree of Protection: Waterproof to **IP67**
- Temperature Range: - 50 to 105°C
- Cable : 0.30 sqmm standard copper
- First insulation PP. Secondary Insulation thermoplastic elastomer. Colour Black
- Hardness 50 shore D
- Halogen- free cable
- Strength of cable : 200N
- Tip: Thermoplastic elastomer overmoulded on the cable
- Insulation resistance: 100MΩ at 1000V DC
- Dielectric Strength: 3000V AC

Temp (°C)	R. (ohm)	A.R (+/- %)
0	41093	6.1
5	33209	5.9
10	26988	5.7
15	22074	5.5
20	18148	5.2
25	15000	5.0
30	12462	5.2
35	10404	5.4
40	8728	5.6
45	7355	5.8
50	6226	5.9

