














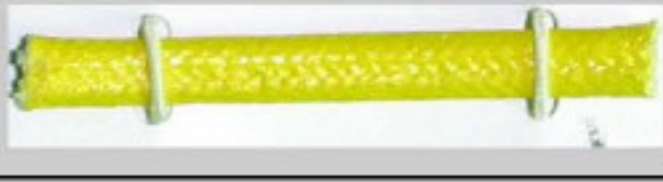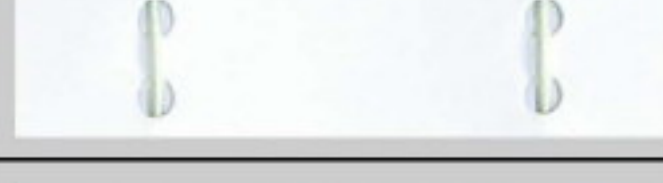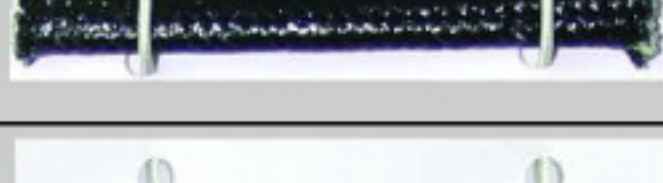

# 各式補償導線訂購規格表—I Thermocouple Compensating Lead Wire—I

代號 WIRE CODE	規格 SPECIFICATION	說明 DESCRIPTION	環境溫度範圍 TEMP. RANGE	外觀尺寸 OVERAL SIZE(mm)	樣品 SAMPLE
TC-CA-H	0.32 * 2	玻璃纖維 GLASS FIBER 素線級 T/C GRADE	0 ~ 200°C	1.6x2.6	
TC-CA-H	0.65 * 2	玻璃纖維 GLASS FIBER 素線級 T/C GRADE	0 ~ 200°C	2.0x3.2	
					
TC-CA-H(OS)	0.65 * 2	玻璃纖維 GLASS FIBER 銅網外隔離 T/C Outer : Cu wire over braided	0 ~ 200°C	1.9x3.0	
TC-CA-H(SOS)	0.65 * 2	玻璃纖維 GLASS FIBER 不鏽鋼外隔離 T/C Outer : Sus wire over braided	0 ~ 200°C	1.9x3.0	
TC-CA-H(SOS)	4/0.32*2	玻璃纖維 GLASS FIBER 不鏽鋼外隔離 T/C Outer : Sus wire over braided	0 ~ 200°C	2.0x3.2	
TC-IC-H(OS)	0.65 * 2	玻璃纖維 GLASS FIBER 不銹鋼外隔離 T/C Outer : Sus wire over braided	0 ~ 200°C	1.9*3.0	
TC-CC-H(OS)	0.65 * 2	玻璃纖維 GLASS FIBER 不銹鋼外隔離 T/C Outer : Sus wire over braided	0 ~ 200°C	1.9*3.0	
TC-PT-H(SOS)	0.65 * 3	玻璃纖維 GLASS FIBER 不鏽鋼外隔離 T/C Outer : Sus wire over braided	0 ~ 200°C	1.9*4.6	
					
WCA-H	4/0.32 * 2	玻璃纖維 GLASS FIBER	0 ~ 200°C	2.0*3.0	
WCA-H	7/0.32 * 2	玻璃纖維 GLASS FIBER	0 ~ 200°C	2.2*3.2	
WCA-H	4/0.65 * 2	玻璃纖維 GLASS FIBER	0 ~ 200°C	3.0*5.0	
WCA-H	7/0.65 * 2	玻璃纖維 GLASS FIBER	0 ~ 200°C	3.3*5.6	
WCA-H(SOS)	4/0.65 * 2	玻璃纖維 GLASS FIBER 不鏽鋼外隔離 Outer : Sus wire over braided	0 ~ 200°C	3.6*5.5	
WCA-H(SOS)	7/0.65 * 2	玻璃纖維 GLASS FIBER 不鏽鋼外隔離 Outer : Sus wire over braided	0 ~ 200°C	3.9*6.2	



代號 WIRE CODE	規格 SPECIFICATION	說明 DESCRIPTION	環境溫度範圍 TEMP. RANGE	外觀尺寸 OVERAL SIZE(mm)	樣品 SAMPLE
WIC-H	4/0.65 * 2	玻璃纖維 GLASS FIBER	0 ~ 200°C	3.0*5.0	
WIC-H	7/0.65 * 2	玻璃纖維 GLASS FIBER	0 ~ 200°C	3.3*5.6	
					
WPR-H	7/0.32 * 2	玻璃纖維 GLASS FIBER	0 ~ 200°C	3.0*5.0	
WPR-H	4/0.65 * 2	玻璃纖維 GLASS FIBER	0 ~ 200°C	3.3*5.6	
					
TC-CA-G	4/0.32 * 2	PVC 素線級 T/C GRADE	0 ~ 105°C	3.8φ	
W-CA-G	4/0.32 * 2	PVC	0 ~ 105°C	3.8φ	
W-CA-G	7/0.32 * 2	PVC	0 ~ 105°C	3.5*5.5	
W-CA-G	4/0.65 * 2	PVC	0 ~ 105°C	4.4*7.0	
W-CA-G-IS	4/0.65 * 2	PVC 鍍錫銅網內隔離 Inner : Cu wire over braided	0 ~ 105°C	5.0*7.6	
W-CA-G	7/0.65 * 2	PVC	0 ~ 105°C	4.8*7.9	
					
W-IC-G	7/0.32 * 2	PVC	0 ~ 105°C	3.5*5.5	
W-IC-G	4/0.65 * 2	PVC	0 ~ 105°C	4.4*7.0	
					
W-CRC-G-IS	4/0.65 * 2	PVC 鍍錫銅網內隔離 Inner : Cu wire over braided	0 ~ 105°C	4.8*7.9	