



# Specification

Contact Type: N/C Type  
Action Temp.: 221°C ± 9°C  
Reset Temp.: 186°C ± 12°C  
Terminal Size: DIP TAB  
Internal Resistance: Below 50mΩ  
Insulation Resistance: More than 100MΩ(with DC500V megger)  
Dielectrle Strength: AC 1500V / 0.5mA / 1 min, no breakdown or flashover  
Rated Amps: 10A 250VAC(resistive load)  
Lifespan: 20,000次 10A 250VAC

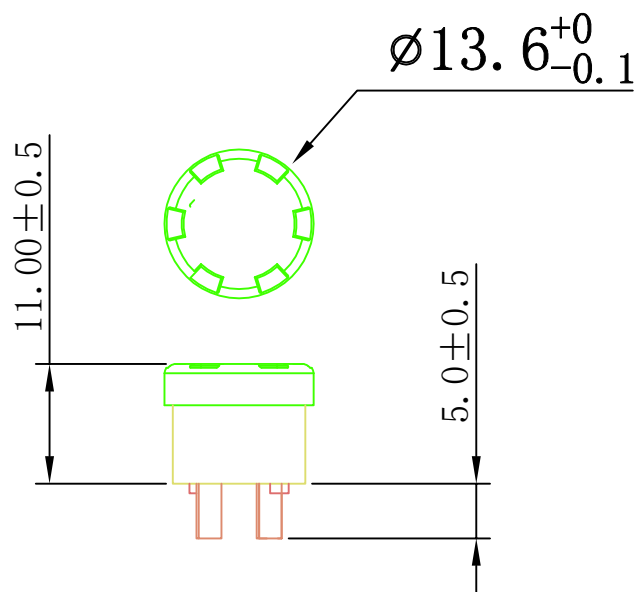

|       |          |         |     |      |                |
|-------|----------|---------|-----|------|----------------|
| RATIO | 2:1 (mm) |         |     |      |                |
|       |          | TYPE    | T02 | CODE | T02A221CCR1-35 |
|       |          | UNIT    | mm  |      |                |
|       |          | DRAWING |     |      |                |
| EDIT  | EDITOR   | XIR     |     |      |                |

Honest-Well Co., Ltd.